



過負荷・短絡保護兼用シリーズ(OC付)
モーター保護兼用

3P・3E・250AF・OC付


GB-253




漏電しゃ断器

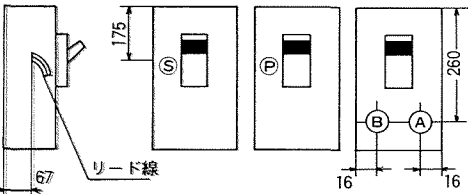型 式		G B — 253																									
極数(P)・素子数(E)・フレーム(A)		3 P , 3 E , 250A																									
保 護 機 能		漏電・過負荷・短絡・モータ保護兼用(OC付)																									
相 線 式		3 φ 3 W																									
定	電 圧 (V)	200, ●415																									
	電 流 (A)	●150, ●175, ●200, ●225, 250																									
	感 度 電 流 (mA)	30, 200																									
	不動作電流 (mA)	20, 100																									
格	しゃ断 電 流 (A)	AC 110V	—																								
		AC 220V	35,000 / 30,000																								
		AC 415V	16,000 / 15,000																								
動作時間の種類(秒)		高速形 (0.1 以内)																									
漏 電 表 示 方 式		機械式 (ボタン)																									
接 続 電 線	定格電流適合電線 (mm ²)	150A	60 (60—12)																								
		175A	80 (80—12)																								
		200A	100 (100—12)																								
		225A	125 (100—12)																								
		250A	150 (別売切削圧着端子)																								
端子ネジの締付トルク (kg・cm)		350～450																									
受 注 仕 様	ハンドルロック		施錠式																								
	補助スイッチ⑤ 感度切替④ 電圧切替(自動) 警報スイッチ⑥ 感度時延切替③																										
																											
	<table><tr><td></td><td>電 圧</td><td>極 数</td><td>定格電流</td><td>定格感度電流</td><td>動作時間</td></tr><tr><td rowspan="4">高 速</td><td>100V</td><td>2</td><td rowspan="4">150～250A</td><td rowspan="2">30～500mA (切替可)</td><td rowspan="4">0.1秒以内</td></tr><tr><td>200V</td><td rowspan="3">2.3</td></tr><tr><td>415V</td></tr><tr><td>200-415V 切替</td></tr><tr><td rowspan="3">時 延</td><td>100V</td><td>2</td><td rowspan="3">150～250A</td><td rowspan="2">30～500mA (切替可)</td><td rowspan="3">0.2～1秒内 (切替可)</td></tr><tr><td>200V</td><td rowspan="2">2.3</td></tr><tr><td>415V</td></tr></table>				電 圧	極 数	定格電流	定格感度電流	動作時間	高 速	100V	2	150～250A	30～500mA (切替可)	0.1秒以内	200V	2.3	415V	200-415V 切替	時 延	100V	2	150～250A	30～500mA (切替可)	0.2～1秒内 (切替可)	200V	2.3
	電 圧	極 数	定格電流	定格感度電流	動作時間																						
高 速	100V	2	150～250A	30～500mA (切替可)	0.1秒以内																						
	200V	2.3																									
	415V																										
	200-415V 切替																										
時 延	100V	2	150～250A	30～500mA (切替可)	0.2～1秒内 (切替可)																						
	200V	2.3																									
	415V																										
端 子 カ バ ー		付属																									
端 子 構 造		圧着端子方式																									
重 量 (kg)		6.0																									
型 式 認 可 番 号		▽対象外																									
漏 電 検 出 方 式		電流動作形																									
過 電 流 引 外 し 方 式		熱動電磁																									
定 価 (円)		39,200																									


(注)①< >は適合圧着端子②●印は受注品(納期2週間)
③しゃ断電流(非対称/対称)

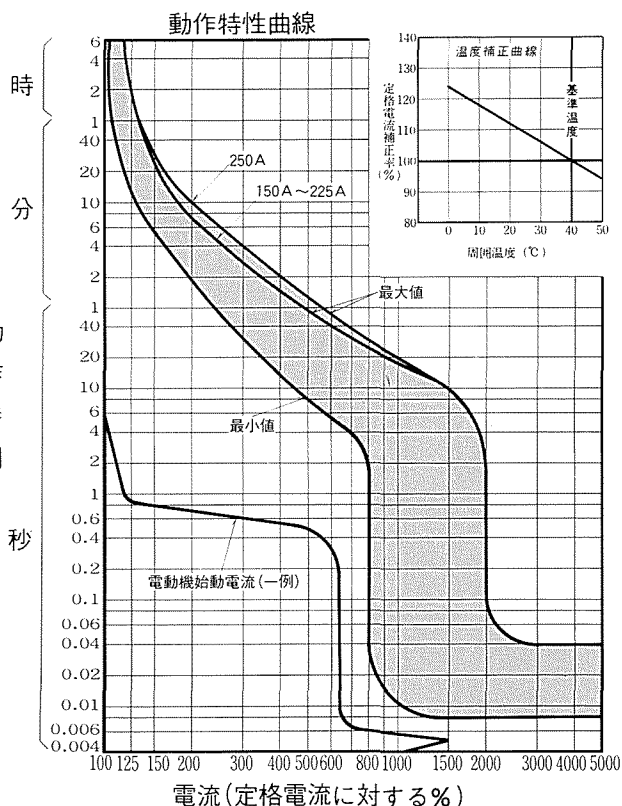

●スタッドの組み方

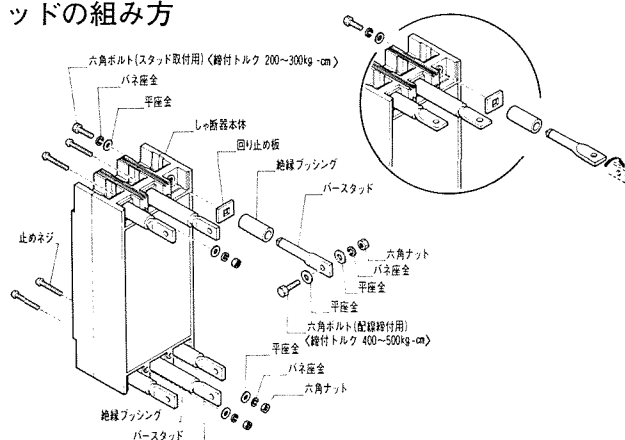

●端子構造

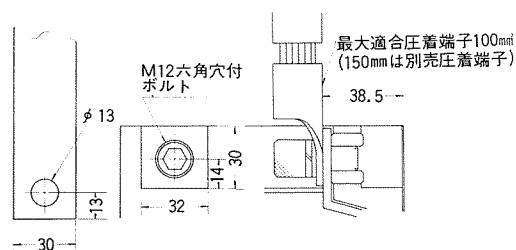

導帯加工図

導帯, 圧着端子接続