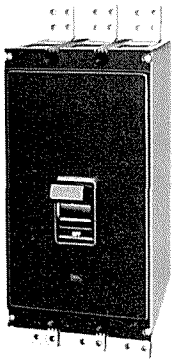

















高しゃ断容量シリーズ

2P・2E・1000AF 3P・3E・1000AF

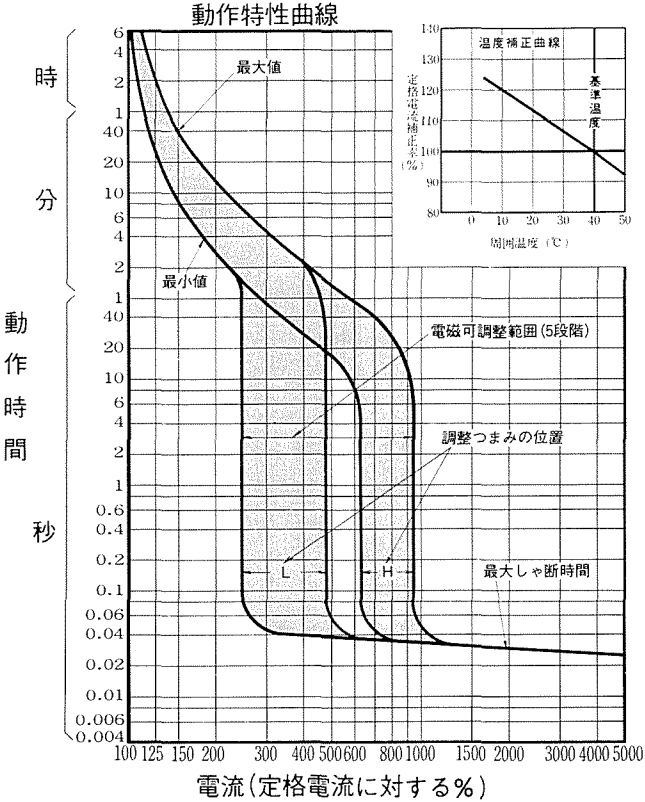
B-1002F B-1003F

旧型式 B-1003 (2)H



型 式				B-1002F	B-1003F
極数(P)・素子数(E)・フレーム(A)				2P・2E・1000A	3P・3E・1000A
相 線 式				1φ2W	3φ3W
基 準 温 度 (℃)				40	
定 格	電 圧 (V)		AC	600	
			DC	250	
	電 流 (A)		●1,000	1,000	
格	しゃ断電流 (A)	JEM JIS	220V	100,000 / 85,000	
			AC 460V	40,000 / 35,000	
			600V	20,000 / 18,000	
			DC 125V	40,000	
			250V	40,000	
引 外 し 方 式				熱動可調整電磁	
バー端子への締付トルク (kg-cm)				120~150	
ハンドルロック				施錠式	
受 注 仕 様	補助スイッチ⑤		電圧引外装置①		
	警報スイッチ⑥		不足電圧引外装置④		
					
					
					
					
					
					
					
					
端子カバー				別売(相間バリア付)	
端子構造				バー端子方式	
重量 (kg)				22	
型式認可番号				▽対象外	
定 価 (円)				400,000	417,000

(注) ①定格しゃ断電流(非対称 / 対称)
②●印は受注品(納期1~3ヶ月)



端子構造

