
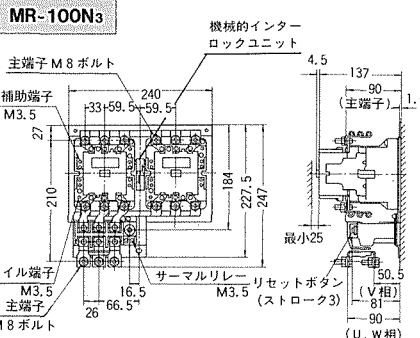

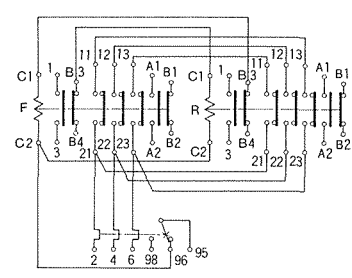
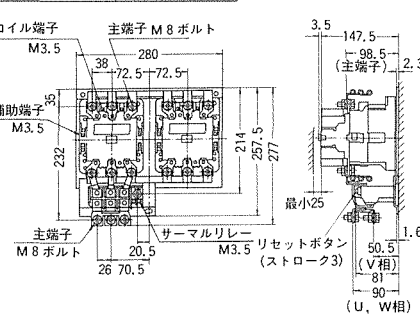

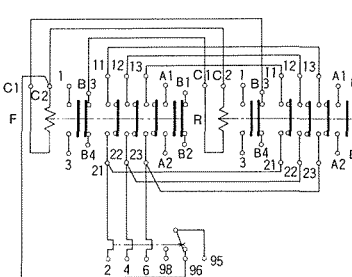
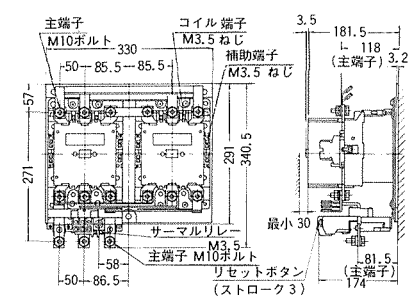

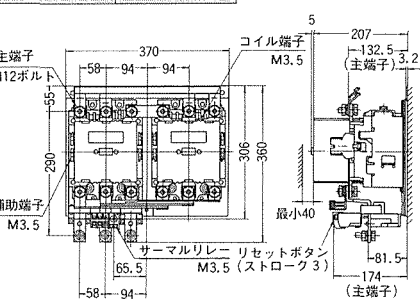




可逆形・電磁開閉器

外形寸法		穴明寸法図(mm)		接点構成図		端子部寸法(mm)																																													
MR-100N₃ 						<table><thead><tr><th colspan="2"></th><th colspan="2">電磁接触器</th><th>サーマルリレー</th></tr><tr><th>主回路</th><th>端子ねじ</th><th>M8ボルト</th><th>M8ボルト</th><th></th></tr></thead><tbody><tr><td rowspan="3">端子寸法</td><td>A</td><td>22</td><td>27</td><td></td></tr><tr><td>B</td><td>8</td><td>10</td><td></td></tr><tr><td>C</td><td>11</td><td>13</td><td></td></tr><tr><td rowspan="3">操作回路</td><td colspan="2">端子ねじ</td><td>M3.5</td><td>M3.5</td><td></td></tr><tr><td rowspan="3">端子寸法</td><td>A</td><td>7.8</td><td>7.8</td><td></td></tr><tr><td>B</td><td>5</td><td>4</td><td></td></tr><tr><td>C</td><td>4.5</td><td>4.5</td><td></td></tr></tbody></table>						電磁接触器		サーマルリレー	主回路	端子ねじ	M8ボルト	M8ボルト		端子寸法	A	22	27		B	8	10		C	11	13		操作回路	端子ねじ		M3.5	M3.5		端子寸法	A	7.8	7.8		B	5	4		C	4.5	4.5	
		電磁接触器		サーマルリレー																																															
主回路	端子ねじ	M8ボルト	M8ボルト																																																
端子寸法	A	22	27																																																
	B	8	10																																																
	C	11	13																																																
操作回路	端子ねじ		M3.5	M3.5																																															
	端子寸法	A	7.8	7.8																																															
		B	5	4																																															
C		4.5	4.5																																																
MR-120N₃ MR-150N₃ 		 ●横取付不可				<table><thead><tr><th colspan="2"></th><th colspan="2">電磁接触器</th><th>サーマルリレー</th></tr><tr><th>主回路</th><th>端子ねじ</th><th>M8ボルト</th><th>M8ボルト</th><th></th></tr></thead><tbody><tr><td rowspan="3">端子寸法</td><td>A</td><td>27</td><td>27</td><td></td></tr><tr><td>B</td><td>10</td><td>10</td><td></td></tr><tr><td>C</td><td>9.5</td><td>13</td><td></td></tr><tr><td rowspan="3">操作回路</td><td colspan="2">端子ねじ</td><td>M3.5</td><td>M3.5</td><td></td></tr><tr><td rowspan="3">端子寸法</td><td>A</td><td>7.8</td><td>7.8</td><td></td></tr><tr><td>B</td><td>6</td><td>4</td><td></td></tr><tr><td>C</td><td>4.5</td><td>4.8</td><td></td></tr></tbody></table>						電磁接触器		サーマルリレー	主回路	端子ねじ	M8ボルト	M8ボルト		端子寸法	A	27	27		B	10	10		C	9.5	13		操作回路	端子ねじ		M3.5	M3.5		端子寸法	A	7.8	7.8		B	6	4		C	4.5	4.8	
		電磁接触器		サーマルリレー																																															
主回路	端子ねじ	M8ボルト	M8ボルト																																																
端子寸法	A	27	27																																																
	B	10	10																																																
	C	9.5	13																																																
操作回路	端子ねじ		M3.5	M3.5																																															
	端子寸法	A	7.8	7.8																																															
		B	6	4																																															
C		4.5	4.8																																																
MR-200N₃ MR-250N₃ 		 ●横取付不可		下図参照		<table><thead><tr><th colspan="2"></th><th colspan="2">電磁接触器</th><th>サーマルリレー</th></tr><tr><th>主回路</th><th>端子ねじ</th><th>M10ボルト</th><th></th><th></th></tr></thead><tbody><tr><td rowspan="3">端子寸法</td><td>A</td><td>37</td><td></td><td></td></tr><tr><td>B</td><td>12.5</td><td></td><td></td></tr><tr><td>C</td><td>16</td><td></td><td></td></tr><tr><td rowspan="3">操作回路</td><td colspan="2">端子ねじ</td><td>M3.5</td><td>M3.5</td><td></td></tr><tr><td rowspan="3">端子寸法</td><td>A</td><td>7.8</td><td>7.8</td><td></td></tr><tr><td>B</td><td>6</td><td>4</td><td></td></tr><tr><td>C</td><td>4.5</td><td>4.5</td><td></td></tr></tbody></table>						電磁接触器		サーマルリレー	主回路	端子ねじ	M10ボルト			端子寸法	A	37			B	12.5			C	16			操作回路	端子ねじ		M3.5	M3.5		端子寸法	A	7.8	7.8		B	6	4		C	4.5	4.5	
		電磁接触器		サーマルリレー																																															
主回路	端子ねじ	M10ボルト																																																	
端子寸法	A	37																																																	
	B	12.5																																																	
	C	16																																																	
操作回路	端子ねじ		M3.5	M3.5																																															
	端子寸法	A	7.8	7.8																																															
		B	6	4																																															
C		4.5	4.5																																																
MR-300N₃ MR-400N₃ 		 ●横取付不可		下図参照		<table><thead><tr><th colspan="2"></th><th colspan="2">電磁接触器</th><th>サーマルリレー</th></tr><tr><th>主回路</th><th>端子ねじ</th><th>M12ボルト</th><th></th><th></th></tr></thead><tbody><tr><td rowspan="3">端子寸法</td><td>A</td><td>44</td><td></td><td></td></tr><tr><td>B</td><td>15</td><td></td><td></td></tr><tr><td>C</td><td>20</td><td></td><td></td></tr><tr><td rowspan="3">操作回路</td><td colspan="2">端子ねじ</td><td>M3.5</td><td>M3.5</td><td></td></tr><tr><td rowspan="3">端子寸法</td><td>A</td><td>7.8</td><td>7.8</td><td></td></tr><tr><td>B</td><td>6</td><td>4</td><td></td></tr><tr><td>C</td><td>4.5</td><td>4.5</td><td></td></tr></tbody></table>						電磁接触器		サーマルリレー	主回路	端子ねじ	M12ボルト			端子寸法	A	44			B	15			C	20			操作回路	端子ねじ		M3.5	M3.5		端子寸法	A	7.8	7.8		B	6	4		C	4.5	4.5	
		電磁接触器		サーマルリレー																																															
主回路	端子ねじ	M12ボルト																																																	
端子寸法	A	44																																																	
	B	15																																																	
	C	20																																																	
操作回路	端子ねじ		M3.5	M3.5																																															
	端子寸法	A	7.8	7.8																																															
		B	6	4																																															
C		4.5	4.5																																																

MR-200N₃・MR-250N₃

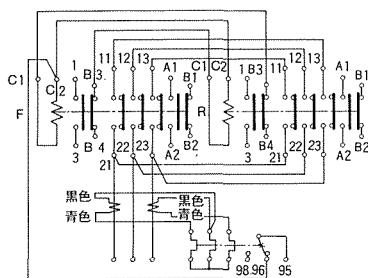

MR-300N₃・MR-400N₃

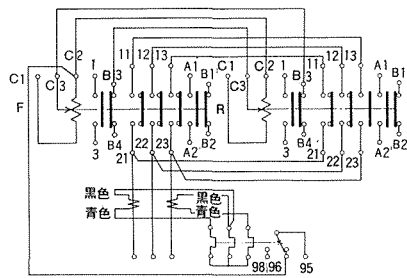

C1: 50Hz
C2: COM
C3: 60Hz