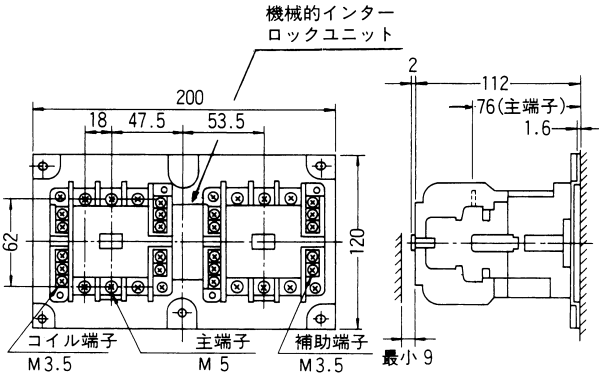

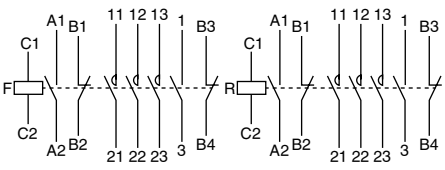
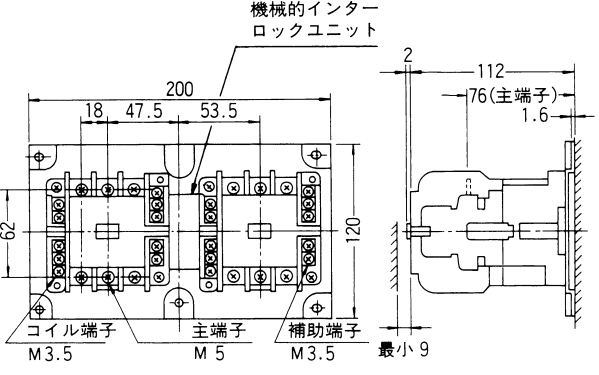
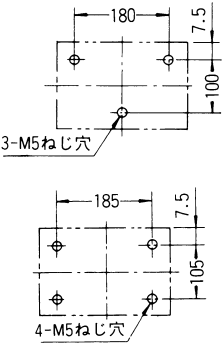
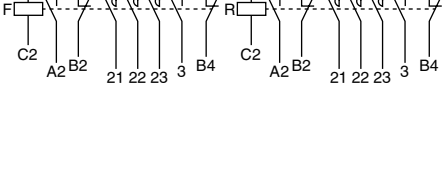
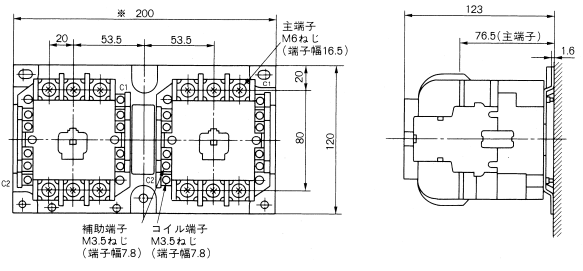

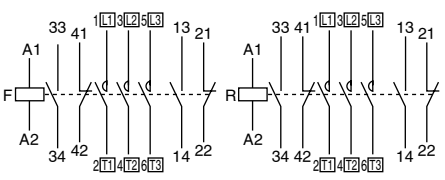
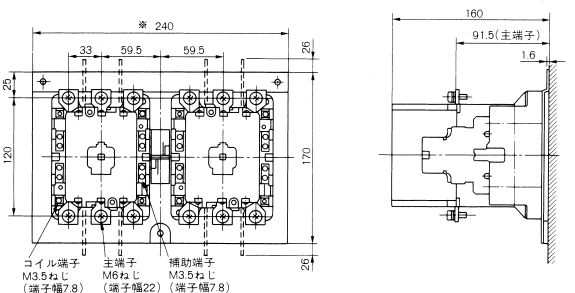

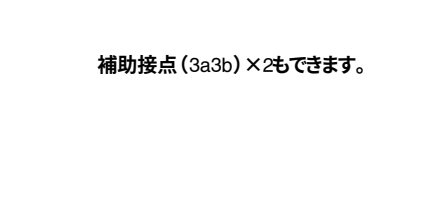


mm

外形寸法	穴明寸法	接点構成図
MR-35H  機械的インター ロックユニット 200 18 47.5 53.5 62 120 コイル端子 M3.5 主端子 M 5 補助端子 M3.5 最小 9 76(主端子) 1.6 112 2	 180 7.5 100 3-M5ねじ穴 185 7.5 105 4-M5ねじ穴	 C1 A1 B1 11 12 13 1 B3 C2 A2 B2 21 22 23 3 B4
MR-50H  機械的インター ロックユニット 200 18 47.5 53.5 62 120 コイル端子 M3.5 主端子 M 5 補助端子 M3.5 最小 9 76(主端子) 1.6 112 2	 180 7.5 100 3-M5ねじ穴 185 7.5 105 4-M5ねじ穴	 C1 A1 B1 11 12 13 1 B3 C2 A2 B2 21 22 23 3 B4
MR-65HA ※補助接点 (3a3b) × 2の場合219  ※ 200 20 53.5 53.5 20 80 120 主端子 M6ねじ (端子幅16.5) 補助端子 M3.5ねじ (端子幅7.8) コイル端子 M3.5ねじ (端子幅7.8) 123 76.5(主端子) 1.6 (2.9kg)	 180 7.5 100 3-M5ねじ穴 横取付はしないでください。	 A1 33 41 11 12 13 13 21 A2 34 42 21 22 23 14 22
MR-80HA ※補助接点 (3a3b) × 2の場合243  ※ 240 33 59.5 59.5 25 120 26 170 26 コイル端子 M3.5ねじ (端子幅7.8) 主端子 M6ねじ (端子幅22) 補助端子 M3.5ねじ (端子幅7.8) 160 91.5(主端子) 1.6 (5.0kg)	 220 10 150 3-M6ねじ穴 横取付はしないでください。	 A1 33 41 11 12 13 13 21 A2 34 42 21 22 23 14 22 補助接点 (3a3b) × 2もできます。