



単3 主幹	単3中性線欠相保護付漏電遮断器			
	40A, 50A	GBU-53HEC	100A	GBU-103HHC
	60A	GBU-63HEC		
	75A	GBU-73HHC		

分岐	パールテクトブレーカ	
	BC-1NA (2P1E20A)	
	BC-2NA (2P2E20A)	
	BC-3-1NSA (2P2E20A)	

色:マンセル8GY9.7/0.2


MAG - T2NP



パールテクト(扉付)




付属機器取付スペース
タテ175×ヨコ75×フカサ64
太陽光発電システム側遮断器
BU-52NS(N端子付)2P2E30A

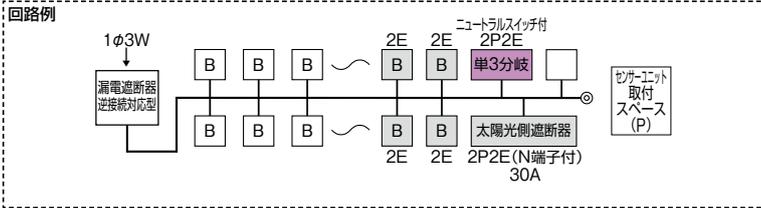

分岐回路数 +予備回路数	主幹 (A)	分岐回路		パールテクト(扉付)			外形寸法(mm)			盤定格 (A)	外形 寸法 図
		2P1E	2P2E	納期 区分	ご注文品番	標準価格 (円)	タテ	ヨコ	フカサ		
6+1	40	4	2	③	MAG34061T2NP	42,400	320	449	118	60	D-208 [2]
	50			③	MAG35061T2NP	42,400					
10+1	40	8	2	③	MAG34101T2NP	48,800	320	483	118	60	D-208 [3]
	50			③	MAG35101T2NP	48,800					
	60			③	MAG36101T2NP	48,800					
14+1	40	10	4	③	MAG34141T2NP	57,500	320	517	118	60	D-209 [4]
	50			③	MAG35141T2NP	57,500					
	60			③	MAG36141T2NP	57,500					
	75			③	MAG37141T2NP	60,500					
18+1	50	14	4	③	MAG35181T2NP	64,800	320	551	118	60	D-209 [5]
	60			③	MAG36181T2NP	64,800					
	75			③	MAG37181T2NP	67,800					
	100			③	MAG310181T2NP	75,800					
22+1	50	16	6	③	MAG35221T2NP	72,500	320	619	118	60	D-209 [6]
	60			③	MAG36221T2NP	72,500					
	75			③	MAG37221T2NP	75,500					
	100			③	MAG310221T2NP	83,300					
26+1	60	20	6	③	MAG36261T2NP	79,500	320	619	118	60	D-209 [6]
	75			③	MAG37261T2NP	82,500					
	100			③	MAG310261T2NP	90,500					
30+1	75	24	6	③	MAG37301T2NP	86,400	320	687	118	75	D-210 [7]
	100			③	MAG310301T2NP	97,400					
34+1	75	28	6	③	MAG37341T2NP	93,500	320	789	118	75	D-210 [8]
	100			③	MAG310341T2NP	104,300					

■上記以外の商品は、別途お問い合わせください。

■センサーユニット取付スペース(P)寸法




太陽光発電システム用ブレーカBU-52NSの
パワーコンディショナへの接続について

※上列取付と下列取付で端子配列が異なります。ご注意ください。


■上列取付の場合

O(白) W(黒) U(赤) パワーコンディショナ

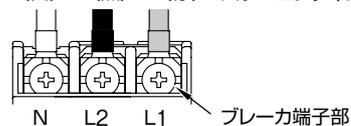

■下列取付の場合

L2 L1 N ブレーカ端子部



W(黒) U(赤) O(白) パワーコンディショナ