

















単3 主幹：単3中性線欠相保護付漏電遮断器

主幹	分岐回路数 +予備回路数	仕様 区分	型式	露出 埋込	メーカー希望 小売価格 (円)	一梱 入数	姿図 露出外形寸法(タテ×ヨコ×フカサ)mm	回路図 寸法図番号(P.215)
3P OC付 30A (30mA、高速形) GBU-3・1E	4+4	○	AG3304-4H	露出	25,100	1		
				埋込	26,000			
3P OC付 40A (30mA、高速形) GBU-53・1E	6+2	○	AG3406-2H	露出	30,300	1		
				埋込	31,200			
	8+0	○	AG3408H	露出	32,000	1		
3P OC付 50A (30mA、高速形) GBU-53・1E	6+2	○	AG3506-2H	露出	30,300	1		
				埋込	31,200			
	8+0	○	AG3508H	露出	32,000	1		
				埋込	32,900			
	8+4	○	AG3508-4H	露出	33,700	1		
				埋込	34,600			
3P OC付 60A (30mA、高速形) GBU-63・1E	10+2	○	AG3510-2H	露出	35,400	1		
				埋込	36,300			
	12+0	○	AG3512H	露出	37,200	1		
				埋込	38,100			
	8+4	○	AG3608-4H	露出	33,700	1		
				埋込	34,600			
3P OC付 60A (30mA、高速形) GBU-63・1E	10+2	○	AG3610-2H	露出	35,400	1		
				埋込	36,300			
	12+0	○	AG3612H	露出	37,200	1		
				埋込	38,100			
	14+2	●	AG3614-2H	露出	40,400	1		
3P OC付 60A (30mA、高速形) GBU-63・1E	16+0	●	AG3616H	露出	42,200	1		
				埋込	43,100			

扉の取外しについて
扉付スチール製分電盤 A 型は扉がワンタッチで取付け取外しができます

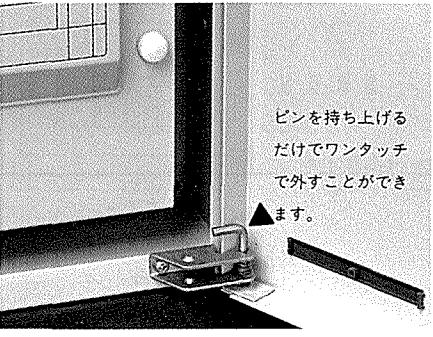

全電力管内向け（リミッタースペース付及び両開きタイプは除く）は右開き、左開きが自由に組替え可能です。

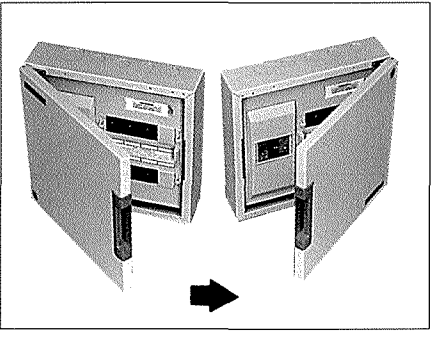

■200V用2P2E安全ブレーカ実装数(100V配線)	分岐回路数	4	6~10	12~16
	200V用(2P2E)実装数	1	2	4
■200V切替可能回路数(右端より)	総実装回路数	8	12	16
	200V切替可能回路数	4	6	8