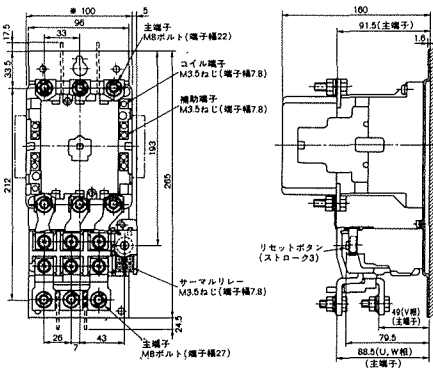

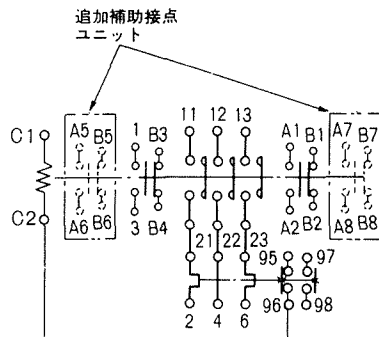
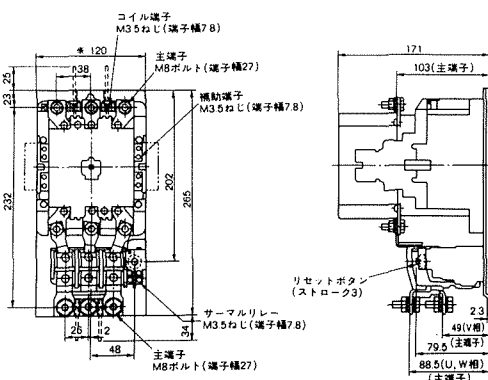

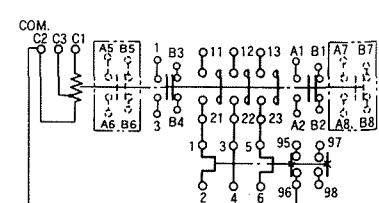
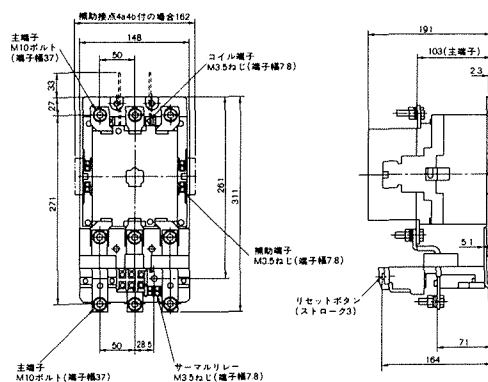

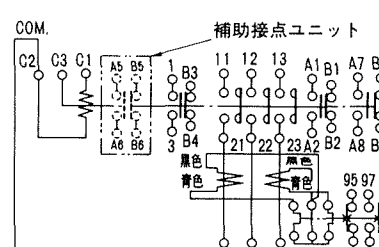
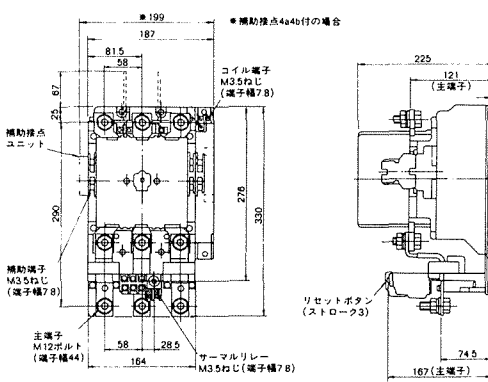

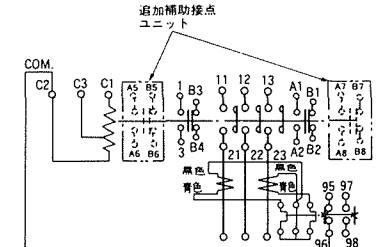


電磁開閉器(非可逆形)

mm

外形寸法	穴明寸法	接点構成図
MP-100H₂, 125H₂ 		追加補助接点ユニット 
MP-150H₂ 		 (コイル電圧200/100Vの例) C1-C2: 200~220V 50/60Hz C3-C2: 100~110V 50/60Hz
MP-200H₂, 250H₂ 		補助接点ユニット  (コイル電圧200/100Vの例) C1-C2: 200~220V 50/60Hz C3-C2: 100~110V 50/60Hz
MP-300H₂, 400H₂ 		追加補助接点ユニット  (コイル電圧200/100Vの例) C1-C2: 200~220V 50/60Hz C3-C2: 100~110V 50/60Hz