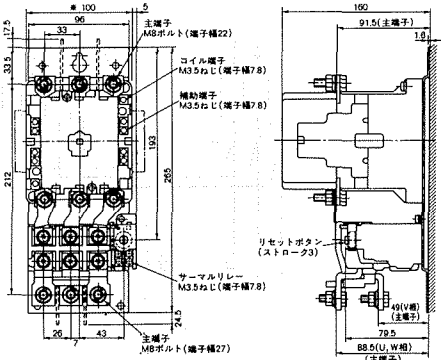

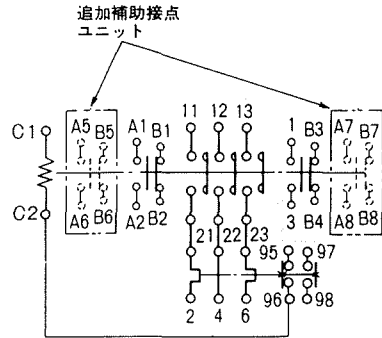
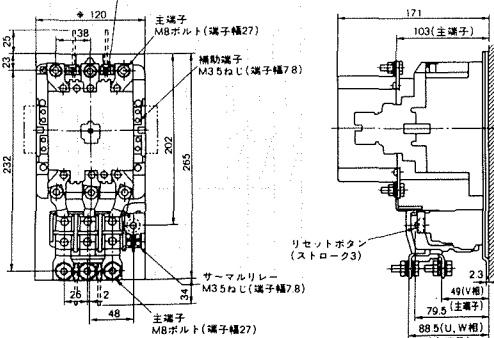

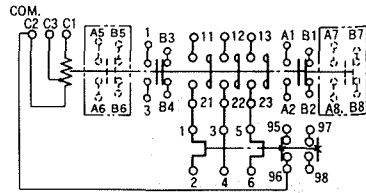
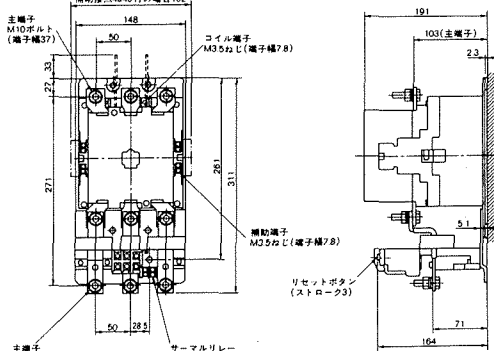

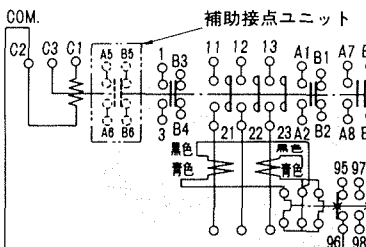
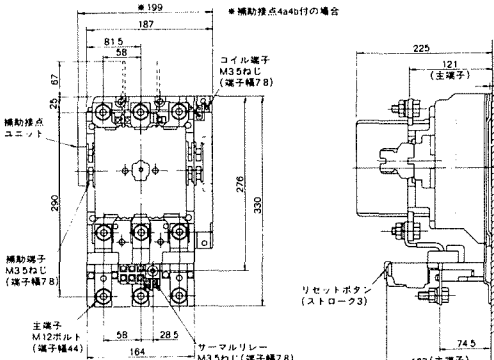

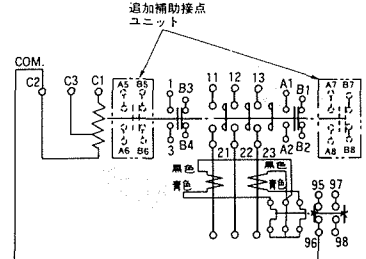


## 電磁開閉器(非可逆形)

| 外形寸法                                                                                                                                    | 穴明寸法                                                                                | 接点構成図                                                                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>MP-100H<sub>2</sub>, 125H<sub>2</sub></b></p>    |    |  <p>追加補助接点<br/>ユニット</p>                                                                                                                            |
| <p><b>MP-150H<sub>2</sub></b></p>                     |   |  <p>COM. C2 C1</p> <p>(コイル電圧200/100Vの例)<br/>C1-C2 : 200~220V 50/60Hz<br/>C3-C2 : 100~110V 50/60Hz</p>                                             |
| <p><b>MP-200H<sub>2</sub>, 250H<sub>2</sub></b></p>  |  |  <p>COM. C2 C3 C1</p> <p>補助接点ユニット</p> <p>黒色<br/>青色</p> <p>(コイル電圧200/100Vの例)<br/>C1-C2 : 200~220V 50/60Hz<br/>C3-C2 : 100~110V 50/60Hz</p>        |
| <p><b>MP-300H<sub>2</sub>, 400H<sub>2</sub></b></p>  |  |  <p>COM. C2 C3 C1</p> <p>追加補助接点<br/>ユニット</p> <p>黒色<br/>青色</p> <p>(コイル電圧200/100Vの例)<br/>C1-C2 : 200~220V 50/60Hz<br/>C3-C2 : 100~110V 50/60Hz</p> |