

















Aタイプ 扉付スチール製
色:マンセル2.5Y9/1

ご注文の際は埋込形か露出形か
ご指定ください。

単3 主幹：単3中性線欠相保護付漏電遮断器


主幹	分岐回路数 +予備回路数	仕様 区分	型式	ご注文品番	露出 埋込	メーカー希望 小売価格 (円)	姿図 外形寸法(タテ×ヨコ×フカサ)mm	回路図 寸法図番号(P.224~225)
3P OC付 30A (30mA、高速形) GBU-3・1EA	4+4	□	AG3304-4H	AG33044HS3	露出	25,100		
				AG33044HF3	埋込	26,000		
	6+2	□	AG3406-2H	AG34062HS3	露出	30,300		
				AG34062HF3	埋込	31,200		
3P OC付 40A (30mA、高速形) GBU-53・1E	8+0	□	AG3408H	AG3408HS3	露出	32,000		
				AG3408HF3	埋込	32,900		
	6+2	□	AG3506-2H	AG35062HS3	露出	30,300		
				AG35062HF3	埋込	31,200		
	8+0	□	AG3508H	AG3508HS3	露出	32,000		
				AG3508HF3	埋込	32,900		
	8+4	□	AG3508-4H	AG35084HS3	露出	33,700		
				AG35084HF3	埋込	34,600		
	10+2	□	AG3510-2H	AG35102HS3	露出	35,400		
				AG35102HF3	埋込	36,300		
3P OC付 50A (30mA、高速形) GBU-53・1E	12+0	□	AG3512H	AG3512HS3	露出	37,200		
				AG3512HF3	埋込	38,100		
	8+4	□	AG3608-4H	AG36084HS3	露出	33,700		
				AG36084HF3	埋込	34,600		
	10+2	□	AG3610-2H	AG36102HS3	露出	35,400		
				AG36102HF3	埋込	36,300		
	12+0	□	AG3612H	AG3612HS3	露出	37,200		
				AG3612HF3	埋込	38,100		
	14+2	□	AG3614-2H	AG36142HS3	露出	40,400		
				AG36142HF3	埋込	41,300		
3P OC付 60A (30mA、高速形) GBU-63・1E	16+0	□	AG3616H	AG3616HS3	露出	42,200		
				AG3616HF3	埋込	43,100		

扉の取外しについて

扉付スチール製分電盤Aタイプは扉がワン
タッチで取付け取外しができます。



全電力管内向け（リミッタースペース付及
び両開きタイプは除く）は右開き、左開き
が自由に組替え可能です。

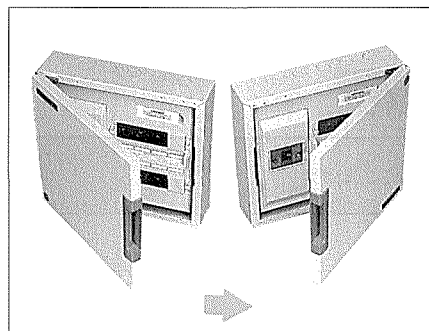

■200V用2P2E安全ブレーカ実装数(100V配線)

分岐回路数	3	4	6~10	12~18	20以上
200V用(2P2E)実装数	0	1	2	4	6

■200V切替可能回路数(右端より)

総実装回路数	8	12	16
200V切替可能回路数	4	6	8

住宅用分電盤規格適合品認定マーク