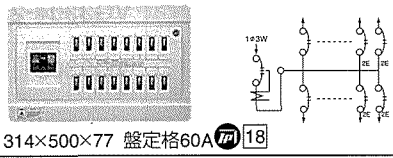
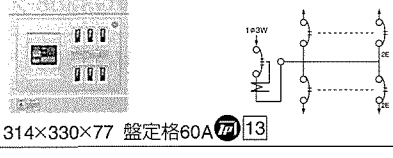
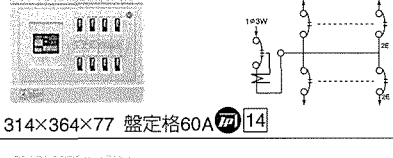
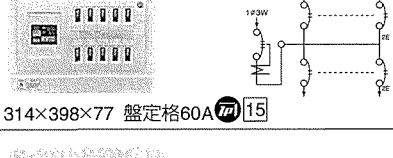
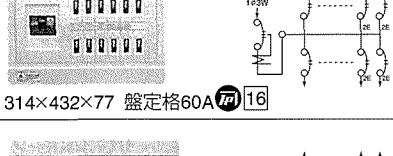
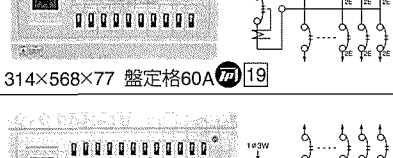
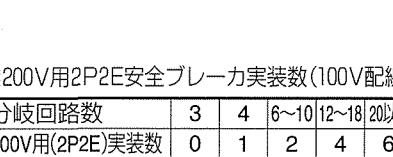


全電力管内向け／リミッタースペースなし

単3 主幹:単3中性線欠相保護付漏電遮断器

主幹	分岐回路数 +予備回路数	仕様 区分	型式	ご注文品番	メーカー希望 小売価格(円)	姿図 外形寸法(タテ×ヨコ×フカサ)mm 回路図 □寸法図番号(P.242~243)
3P OC付 40A 30mA高速形	12+4	☐	VG3412-4	VG341243	34,000	 314×500×77 盤定格60A 18
	14+2	☐	VG3414-2	VG341423	35,800	
	16+0	☐	VG3416	VG34163	37,600	
3P OC付 50A 30mA高速形	4+2	☐	VG3504-2	VG350423	20,300	 314×330×77 盤定格60A 13
	6+0	☐	VG3506	VG35063	22,100	
	6+2	☐	VG3506-2	VG350623	23,500	 314×364×77 盤定格60A 14
	8+0	☐	VG3508	VG35083	25,300	
	8+2	☐	VG3508-2	VG350823	26,000	 314×398×77 盤定格60A 15
	10+0	☐	VG3510	VG35103	27,800	
	8+4	☐	VG3508-4	VG350843	28,000	 314×432×77 盤定格60A 16
	10+2	☐	VG3510-2	VG351023	29,800	
	12+0	☐	VG3512	VG35123	31,600	 314×466×77 盤定格60A 17
	12+2	☐	VG3512-2	VG351223	33,000	
	14+0	☐	VG3514	VG35143	34,800	 314×500×77 盤定格60A 18
	12+4	☐	VG3512-4	VG351243	34,000	
	14+2	☐	VG3514-2	VG351423	35,800	 314×568×77 盤定格60A 19
	16+0	☐	VG3516	VG35163	37,600	
	18+2	☐	VG3518-2	VG351823	40,300	 314×661×77 盤定格60A 20
	20+0	☐	VG3520	VG35203	42,100	
	22+2	☐	VG3522-2	VG352223	49,200	
	24+0	☐	VG3524	VG35243	51,000	

■200V用2P2E安全ブレーカ実装数(100V配線)

分岐回路数	3	4	6~10	12~18	20以上
200V用(2P2E)実装数	0	1	2	4	6

住宅用分電盤規格適合品認定マーク