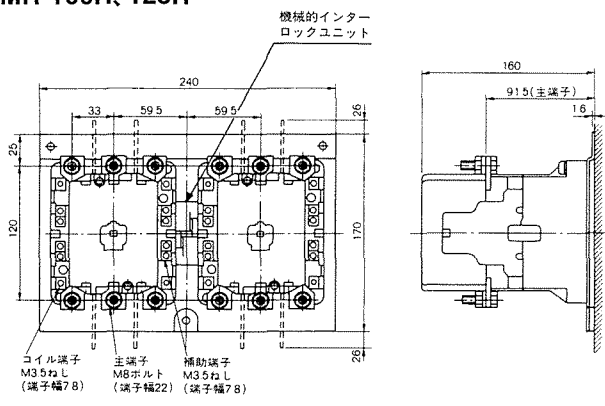

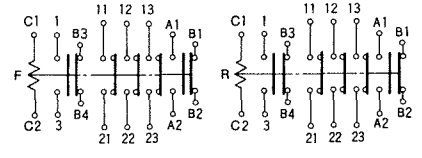
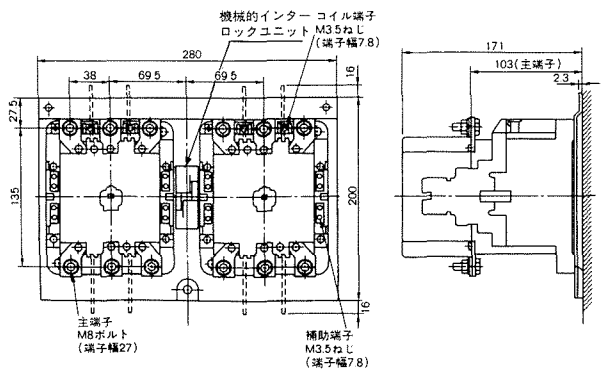

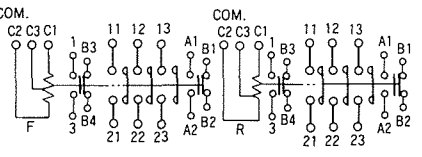
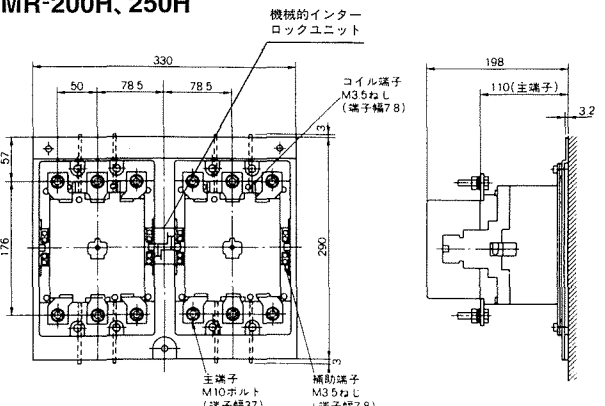

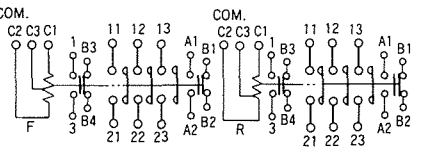
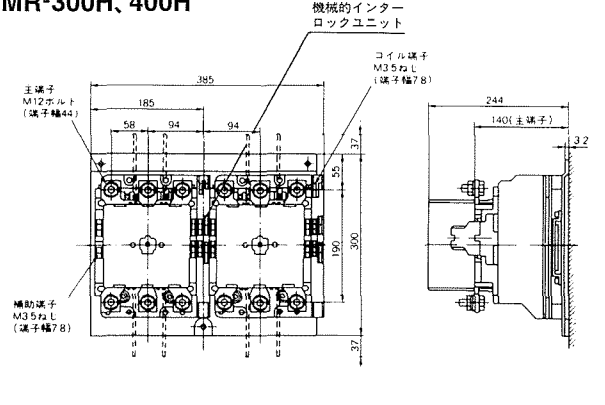



電磁接触器(可逆形)

mm

外形寸法	穴明寸法	接点構成図
MR-100H, 125H 		
MR-150H 		
MR-200H, 250H 		(コイル電圧200/100Vの例) C1-C2 : 200~220V 50/60Hz C3-C2 : 100~110V 50/60Hz 
MR-300H, 400H 		(コイル電圧200/100Vの例) C1-C2 : 200~220V 50/60Hz C3-C2 : 100~110V 50/60Hz 