














全電力管内向け／リミッタースペースなし

単3 主幹：単3中性線欠相保護付漏電遮断器 付属機器取付スペース付 タテ ヨコ フカサ 180×90×58

主幹	分岐回路数 +予備回路数	仕様 区分	型式	ご注文品番	露出 埋込	メーカー希望 小売価格(円)	外形寸法(タテ×ヨコ×フカサ)mm	回路図 寸法図番号
3P OC付 50A 30mA高速形	6+2	○	AG3506-2PA	AG35062PAS3	露出	24,400		
				AG35062PAF3	埋込	31,100		
	8+0	○	AG3508PA	AG3508PAS3	露出	25,800		
				AG3508PAF3	埋込	32,500		
	8+2	○	AG3508-2PA	AG35082PAS3	露出	27,700		
				AG35082PAF3	埋込	34,400		
	10+0	○	AG3510PA	AG3510PAS3	露出	29,100		
				AG3510PAF3	埋込	35,800		
	10+2	○	AG3510-2PA	AG35102PAS3	露出	31,000		
				AG35102PAF3	埋込	37,900		
	12+0	○	AG3512PA	AG3512PAS3	露出	32,400		
				AG3512PAF3	埋込	39,300		
	12+2	○	AG3512-2PA	AG35122PAS3	露出	34,300		
				AG35122PAF3	埋込	41,200		
	14+0	○	AG3514PA	AG3514PAS3	露出	35,700		
				AG3514PAF3	埋込	42,600		
	14+2	○	AG3514-2PA	AG35142PAS3	露出	37,500		
				AG35142PAF3	埋込	44,500		
	16+0	○	AG3516PA	AG3516PAS3	露出	38,900		
				AG3516PAF3	埋込	45,900		
	18+2	○	AG3518-2PA	AG35182PAS3	露出	45,500		
				AG35182PAF3	埋込	53,500		
	20+0	○	AG3520PA	AG3520PAS3	露出	46,900		
				AG3520PAF3	埋込	54,900		

■外形寸法図 P.353～ ■図番 23～28


■付属機器取付スペース取付有効寸法
タテ180×ヨコ90×フカサ58mm
深夜電力回路、チャイムトランス等の組
込みに便利です。



■付属機器取付スペース用セパレーター(別売)
取付可能です。別途お問合わせください。

分電盤の通電電流に大きく影響を及ぼすよ
うな分岐回路の増設は避けてください。

●送り端子付です。

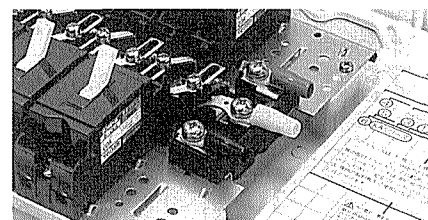

分岐回路数	3	4	6~10	12~18	20以上
200V用(2P2E)実装数	0	1	2	4	6