



A
B
C
D
E
F
G
H

1 2 3 4 5 6 7 8 9 10 11

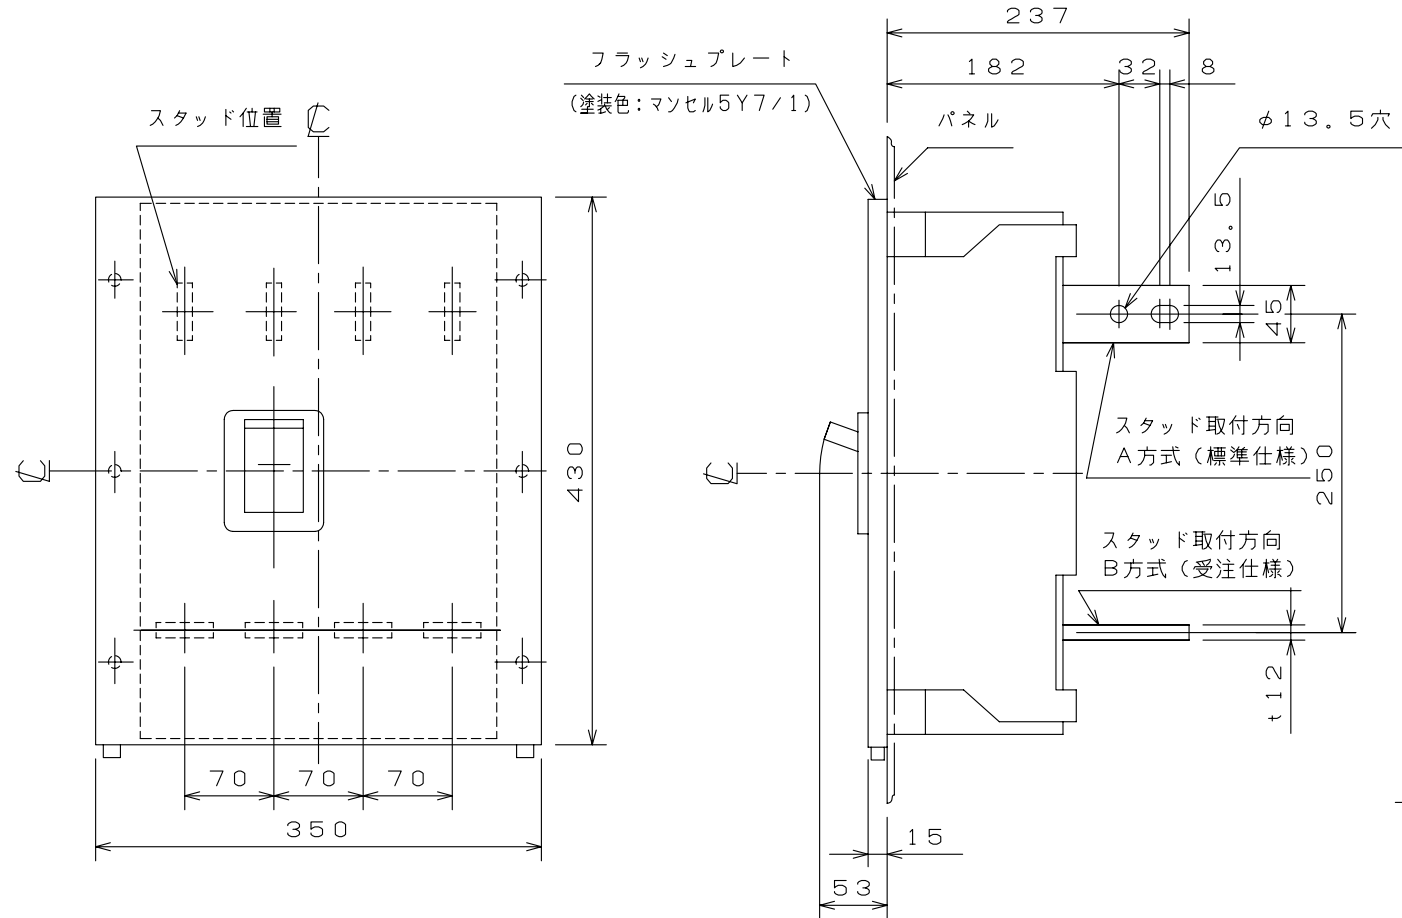


バースタッド方向標準 (A方式) で出荷します。

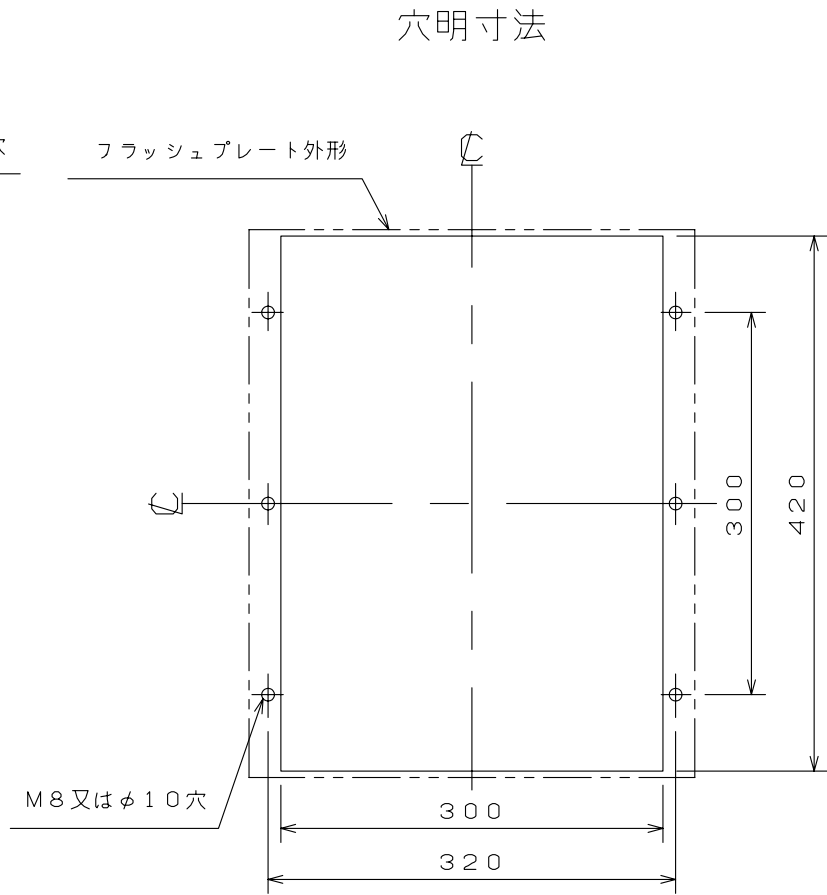

電子式配線用遮断器
埋込形

A
B
C
D

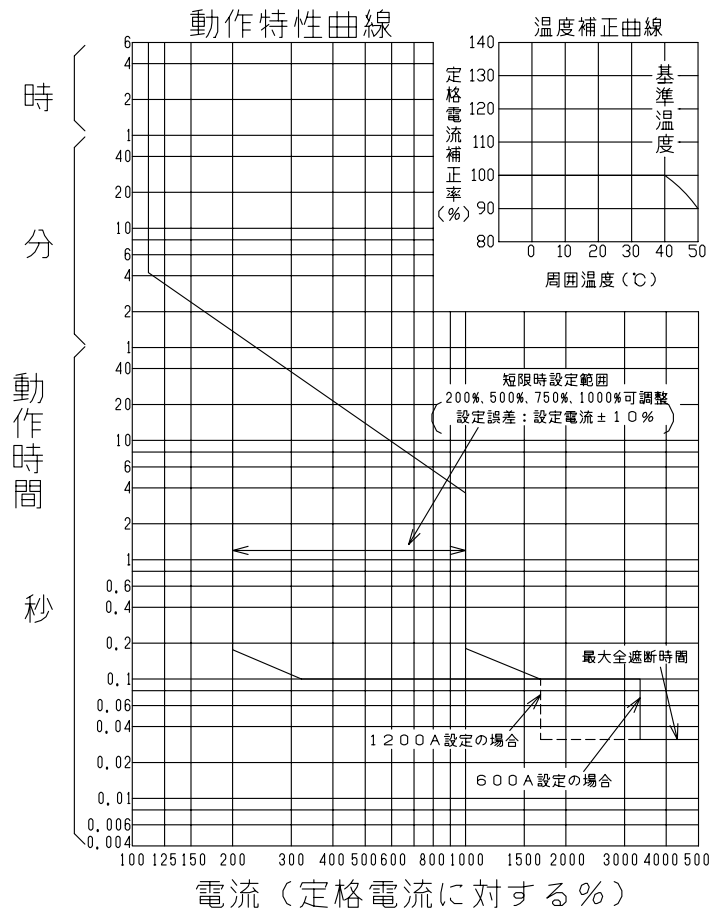

型 式		B - 1 2 0 4 W																									
フ レ ー ム		1200AF																									
極 数 (P)・素 子 数 (E)		4P・3E																									
定 格 電 圧 (V)		AC500																									
定 格 電 流 (A)		可調整 600/700/800/1000/1200																									
定 格 遮 断 容 量 (kA)																											
A C	100V																										
	200V	125																									
	440V	85																									
	500V	42																									
D C	125V																										
	250V																										
引き外し方式		電子式可調整																									
標準接続方式		バースタッド方式																									
基準周囲温度		40℃																									
重量 (kg)		47																									
備 考		J I S C 8201-2-1 附属書2 (J I S Q 1000に基づく自己適合宣言)																									
御納入先																											
日付					受領印					数量																	
承認		検 図		製 図		設 計																					
																											
年 月 日		三 角 法		B		- 1		2		0		4		W		0		3									
H07.03.08																											
テンパール工業株式会社																											

H

1 2 3 4 5 6 7 8 9 10 11