

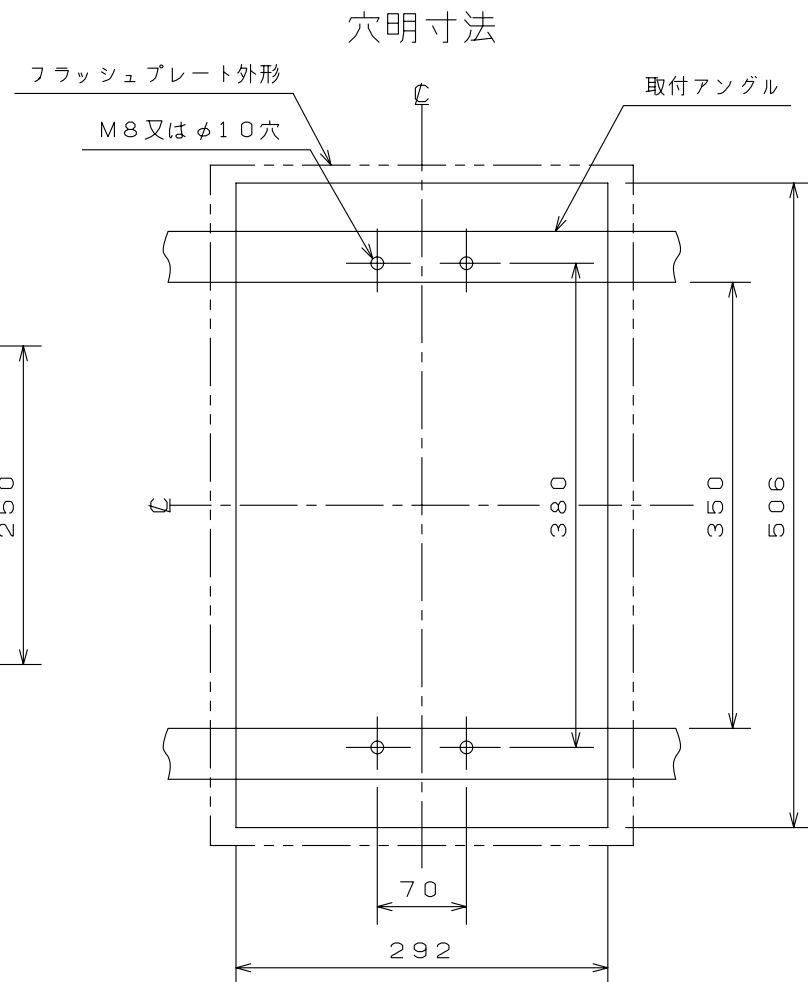
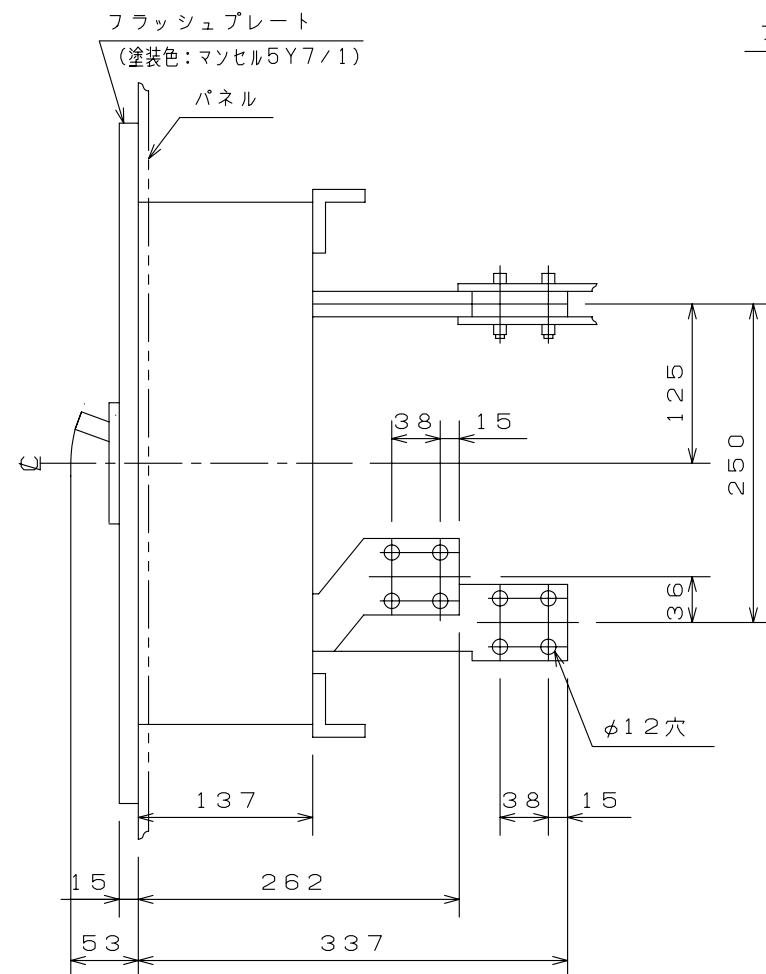


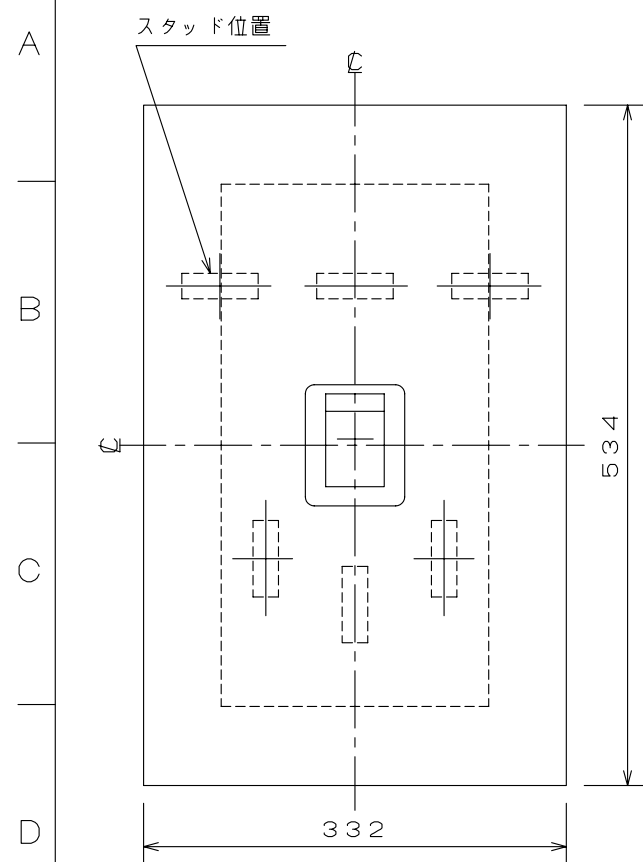

電子式配線用遮断器

埋込形

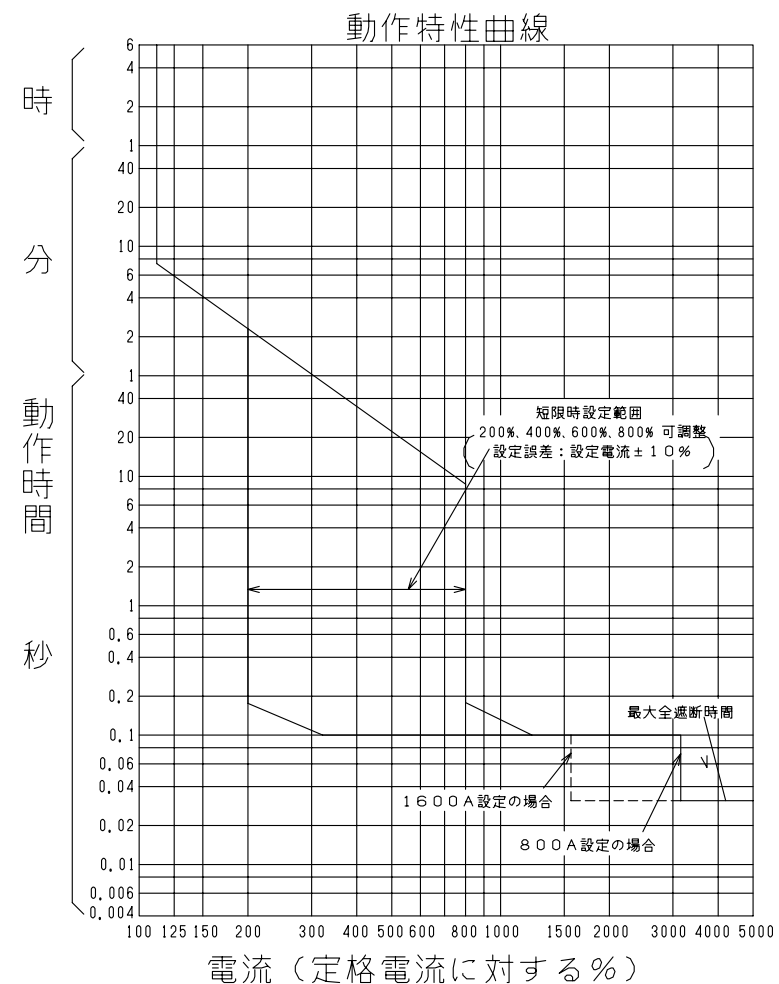

型 式	B - 1 6 0 3 W A													
フ レーム	1600AF													
極数(P)・素子数(E)	3P・3E													
定格電圧 (V)	AC500													
定格電流 (A)	可調 800/900/1000/1200/1400/1600													
定格遮断容量 (kA)	.													
A C	100V	.												
	200V	125												
	440V	85												
	500V	42												
D C	125V	.												
	250V	.												
引き外し方式	電子式可調整													
標準接続方式	バースタッド方式													
基準周囲温度	40℃													
重量 (kg)	42													
備 考	J I S C 8201-2-1 附属書2 (J I S Q 1000に基づく自己適合宣言)													
御納入先														
日付				受領印				数量						
承認	検 図		製 図		設 計									
														
年 月 日	三 角 法		B-1603WA03											
H07.03.08														
テンパール工業株式会社														