
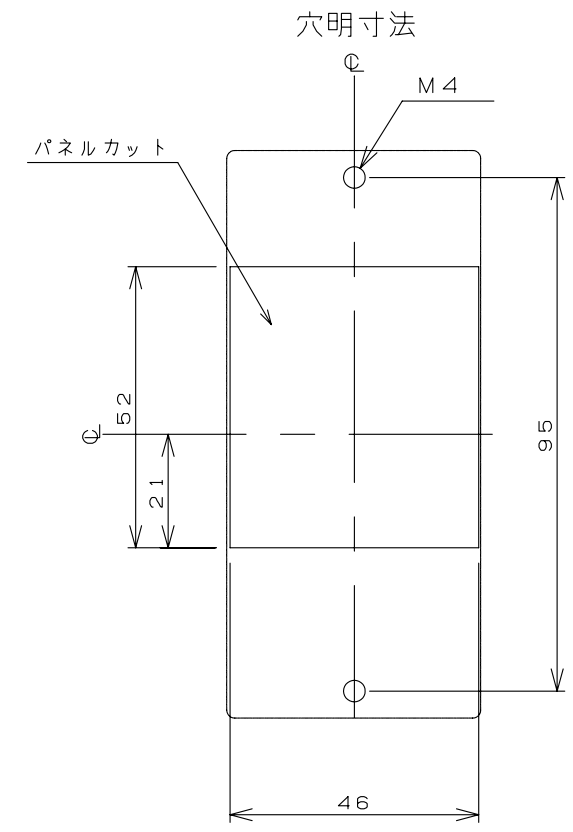



1 2 3 4 5 6 7 8 9 10 11

A
B
C
D
E
F
G
H


A
B
C
D
E
F
G
H

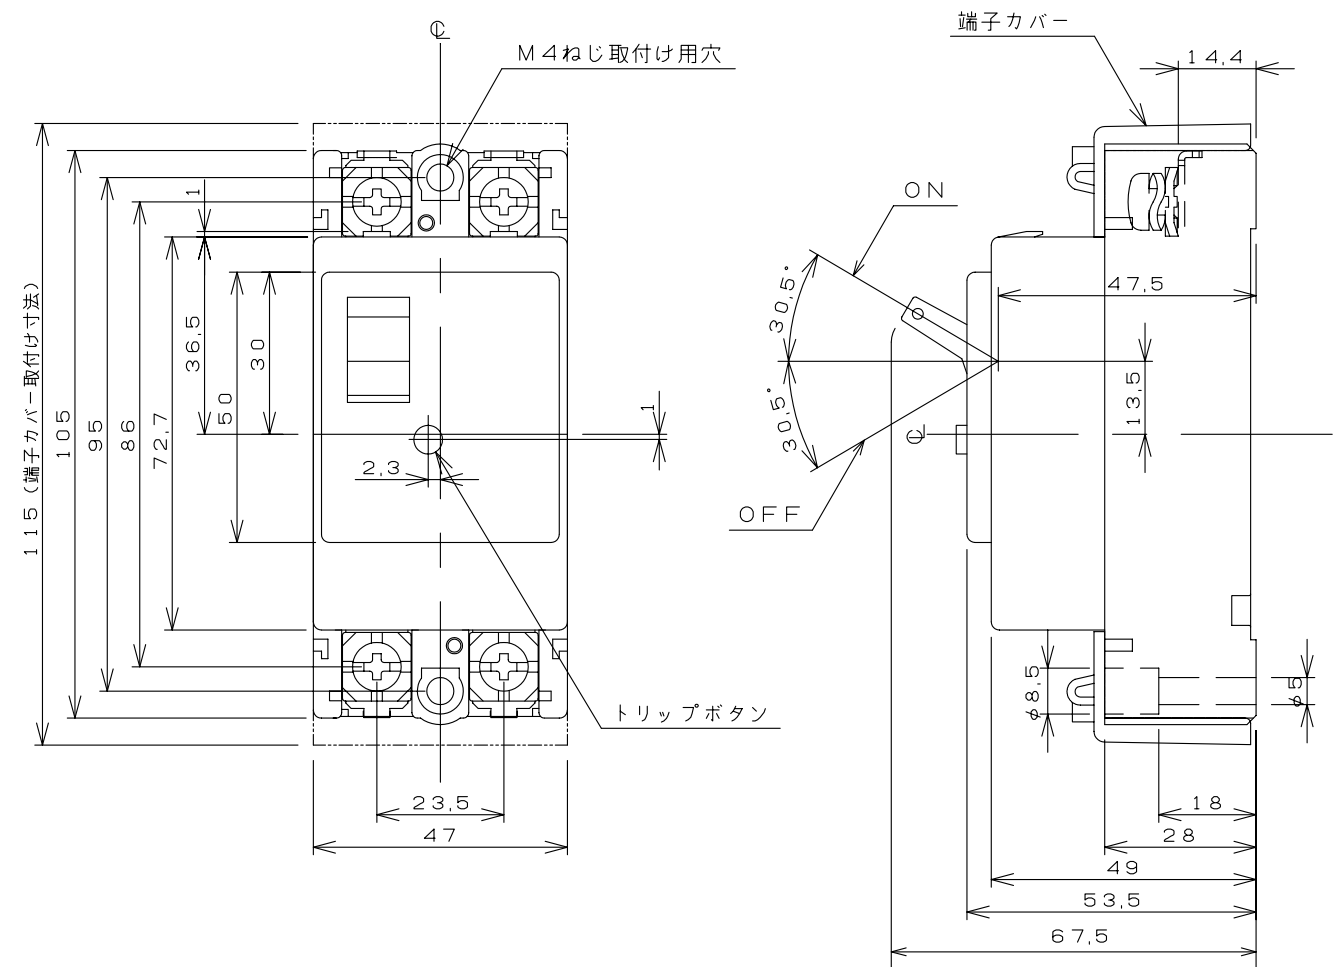

配線用遮断器

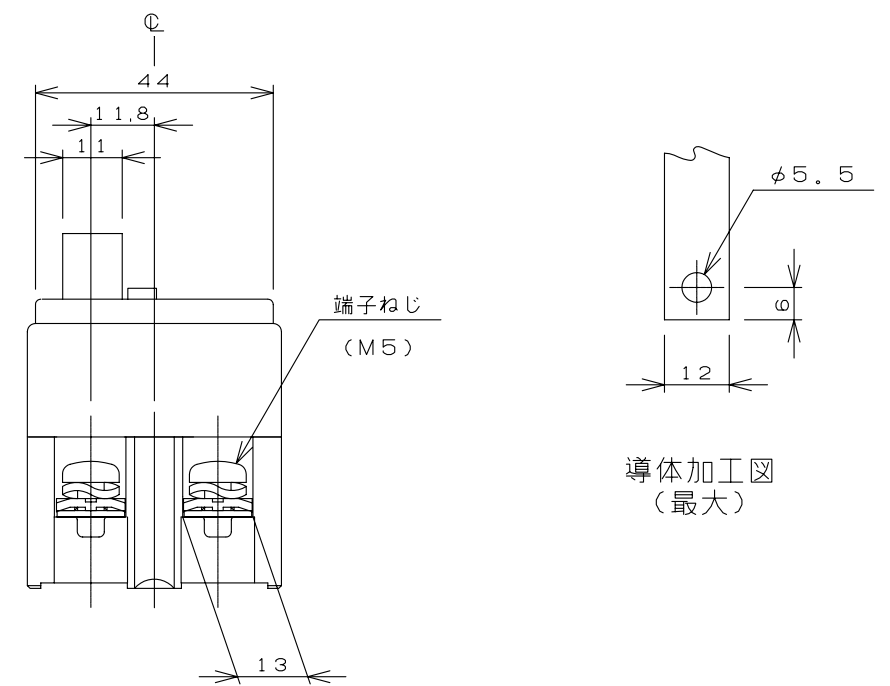

導体加工図
(最大)

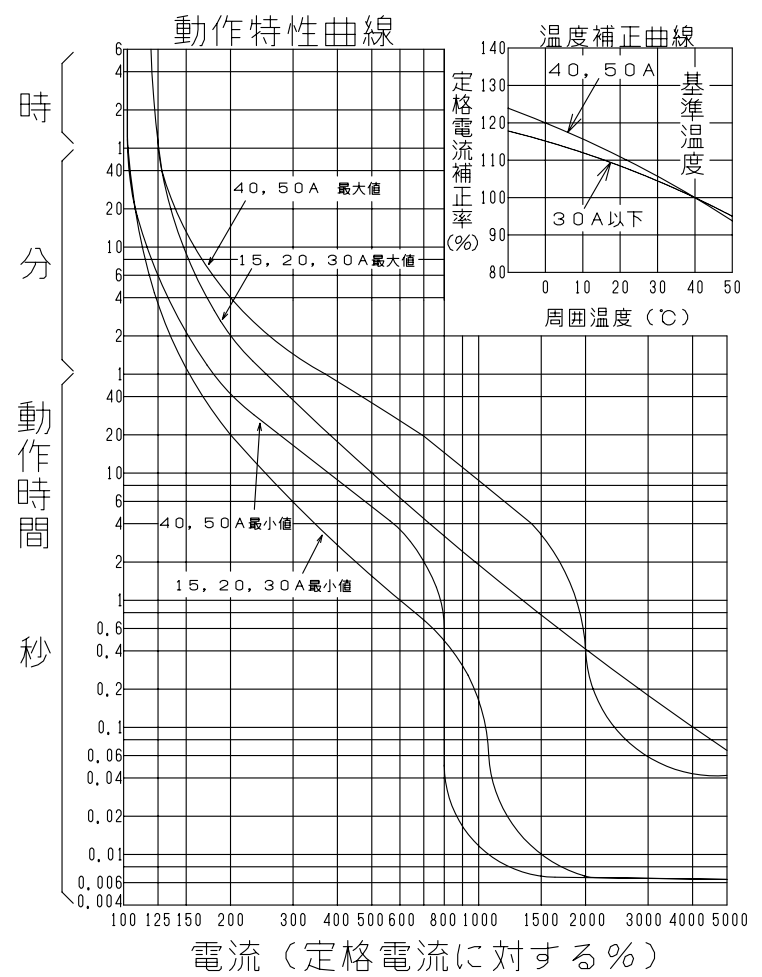

型 式	B - 5 2 E B																
フ レ ム	50AF																
極数(P)・素子数(E)	2P・2E																
定格電圧 (V)	AC460V・DC125V																
定格電流 (A)	15A, 20A, 30A, 40A, 50A																
定格遮断容量 (kA)																	
A C	110V		2.5														
	110V/220V		2.5														
	220V		2.5														
	460V		1.5														
D C	100V		0.7														
	250V																
引き外し方式	熱動電磁																
標準接続方式	線押え方式 (圧着端子使用可能)																
基準周囲温度	40℃																
重量 (kg)	0.22																
備 考																	
御納入先																	
日付				受領印				数量									
承認	検 図		製 図	設 計													
後藤	田		品	西野													
年 月 日	三 角 法			A	2	1	-	2	P	5	2	E	B	0	1		
H08.04.01																	
テンパール工業株式会社																	

1 2 3 4 5 6 7 8 9 10 11