
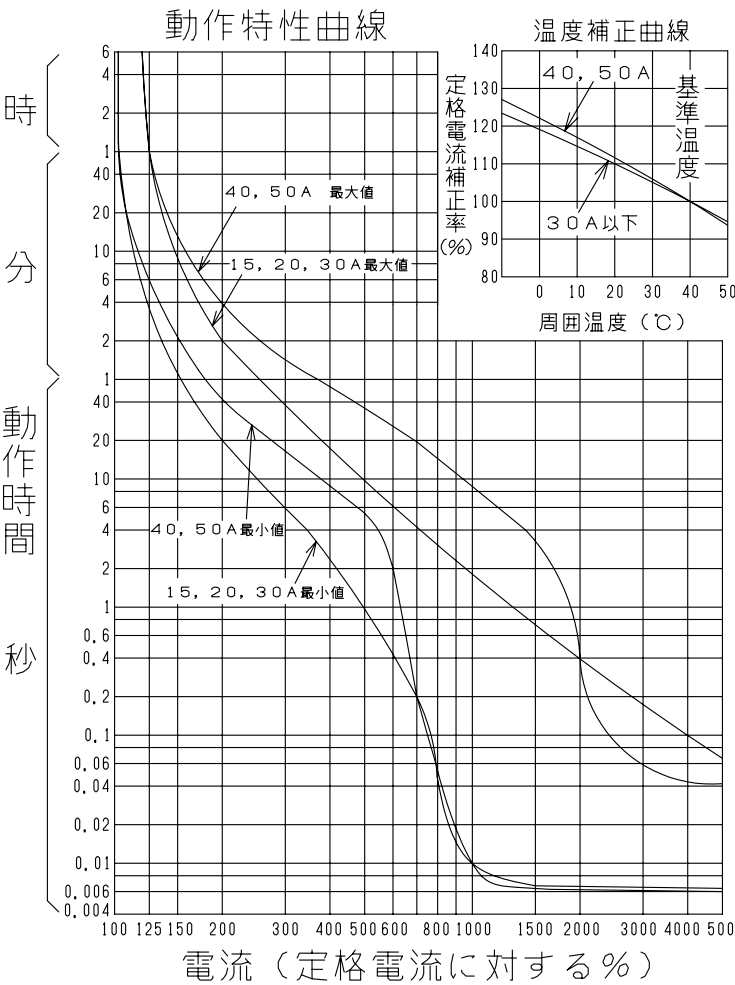


A
B
C
D
E
F
G
H

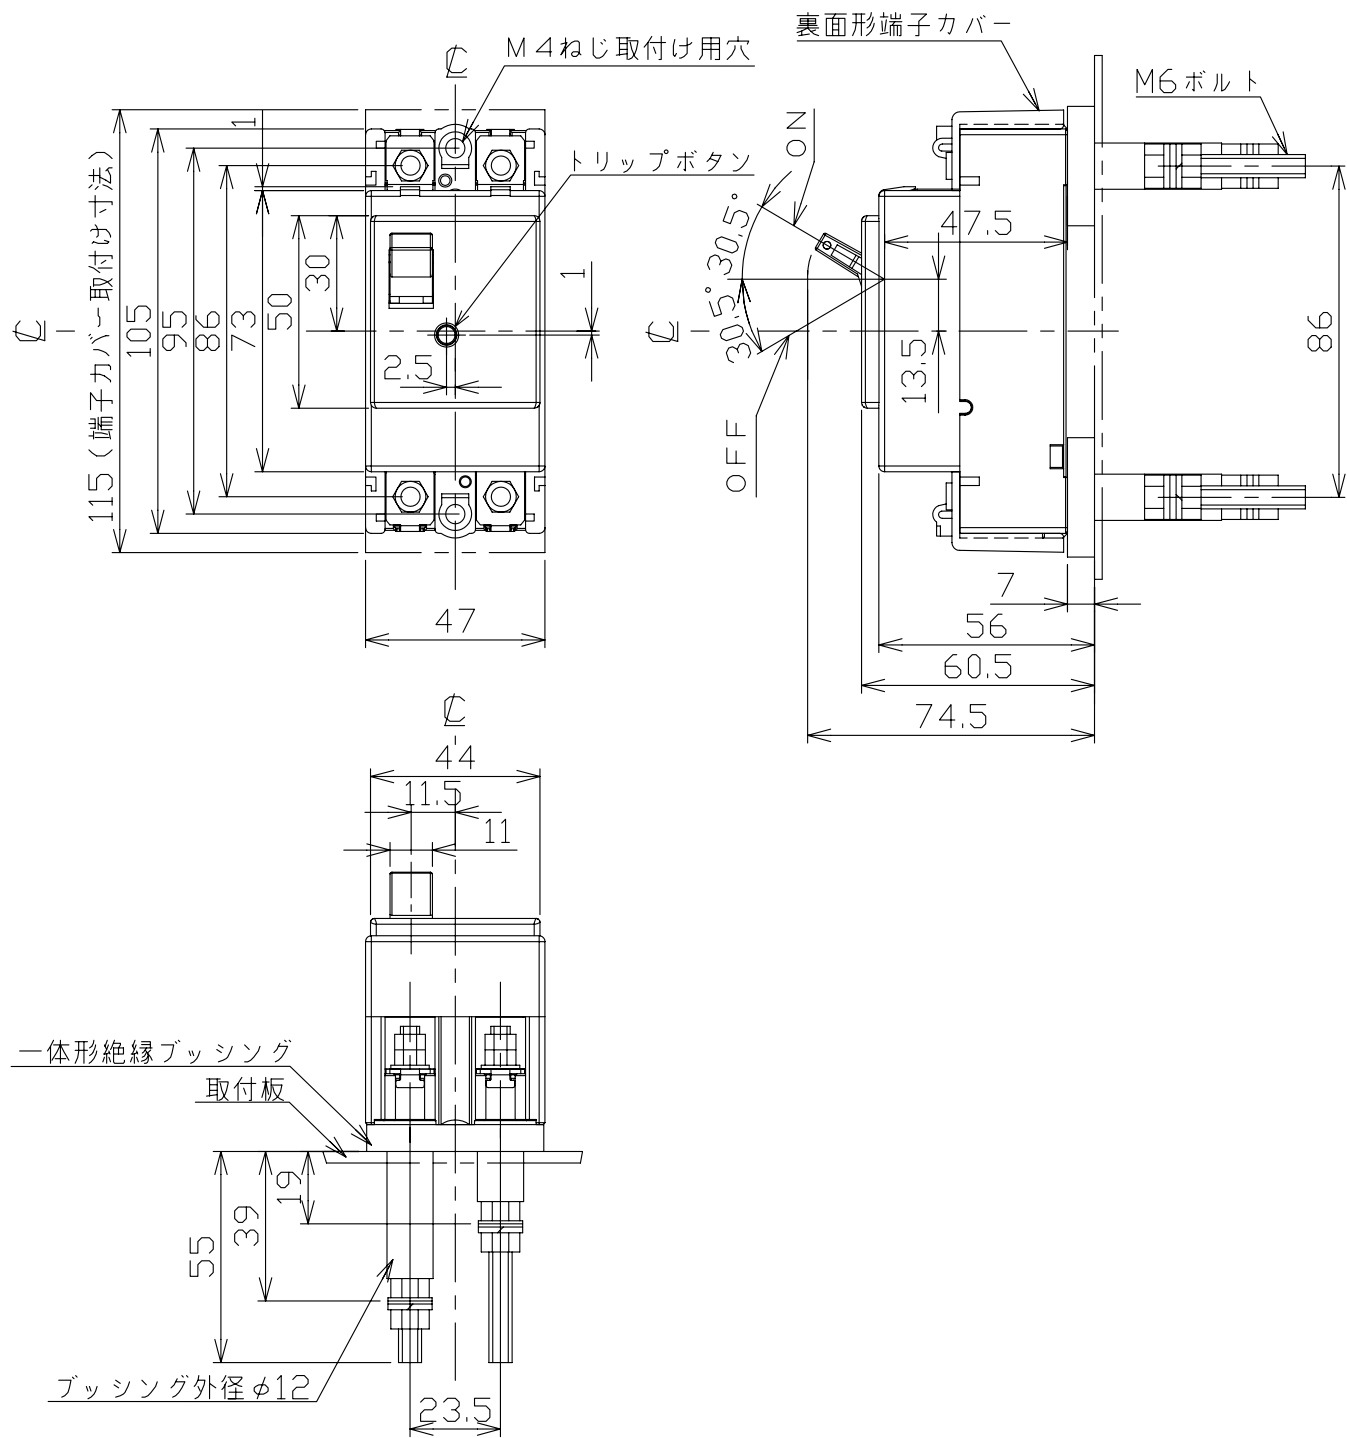

型 式		B - 5 2 E C									
フ レ ム		50AF									
極数(P)・素子数(E)		2P・2E									
定格電圧 (V)		AC415, DC125									
定格電流 (A)		15, 20, 30, 40, 50									
定格遮断容量 (kA)											
A C	100V	5									
	100V/200V	5									
	200V	5									
	415V	2.5									
D C	125V	0.7									
	250V										
引き外し方式		熱動電磁									
標準接続方式		丸スタッド方式									
基準周囲温度		40℃									
重量 (kg)		0.33									
備 考		JIS C 8201-2-1 附属書2 (JIS Q 1000に基づく自己適合宣言)									
御納入先											
日付		受領印			数量						
承認		検 図		製 図		設 計					
											
年 月 日		三 角 法		A37-2P52EC2							
H18.02.28											
テンパール工業株式会社											

A
B
C
D
E
F
G
H

配線用遮断器 裏面形