
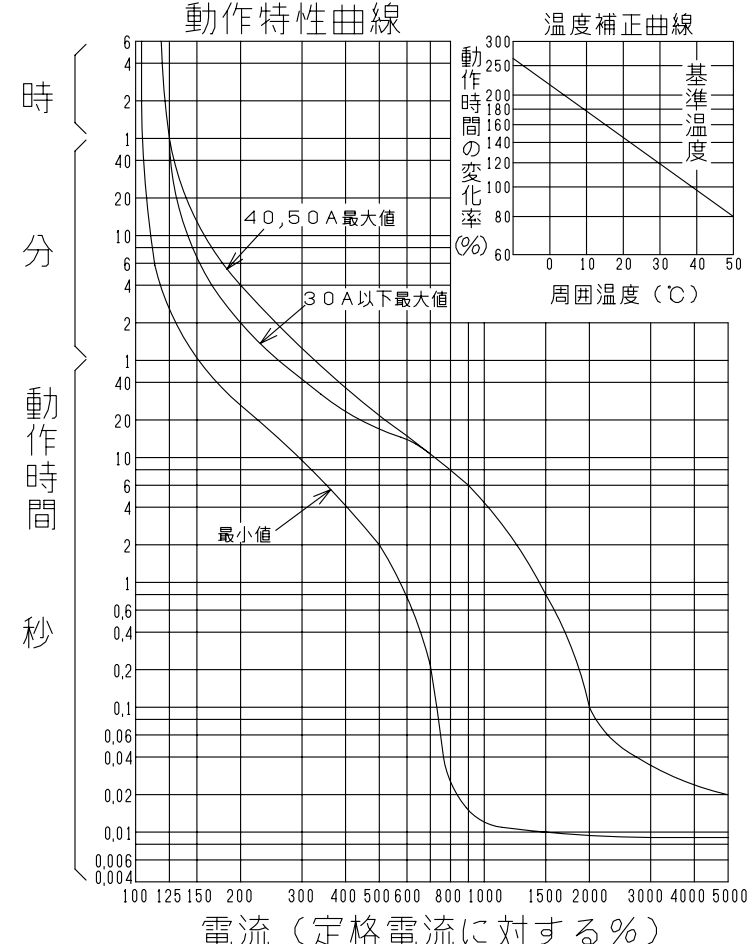
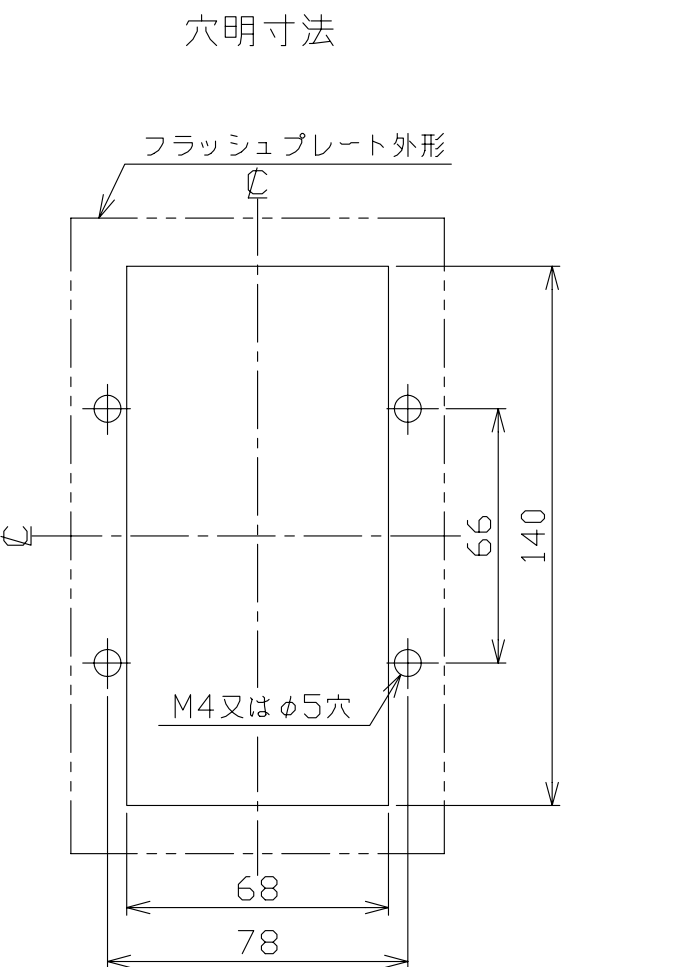


A
B
C
D
E
F
G
H

1234567891011

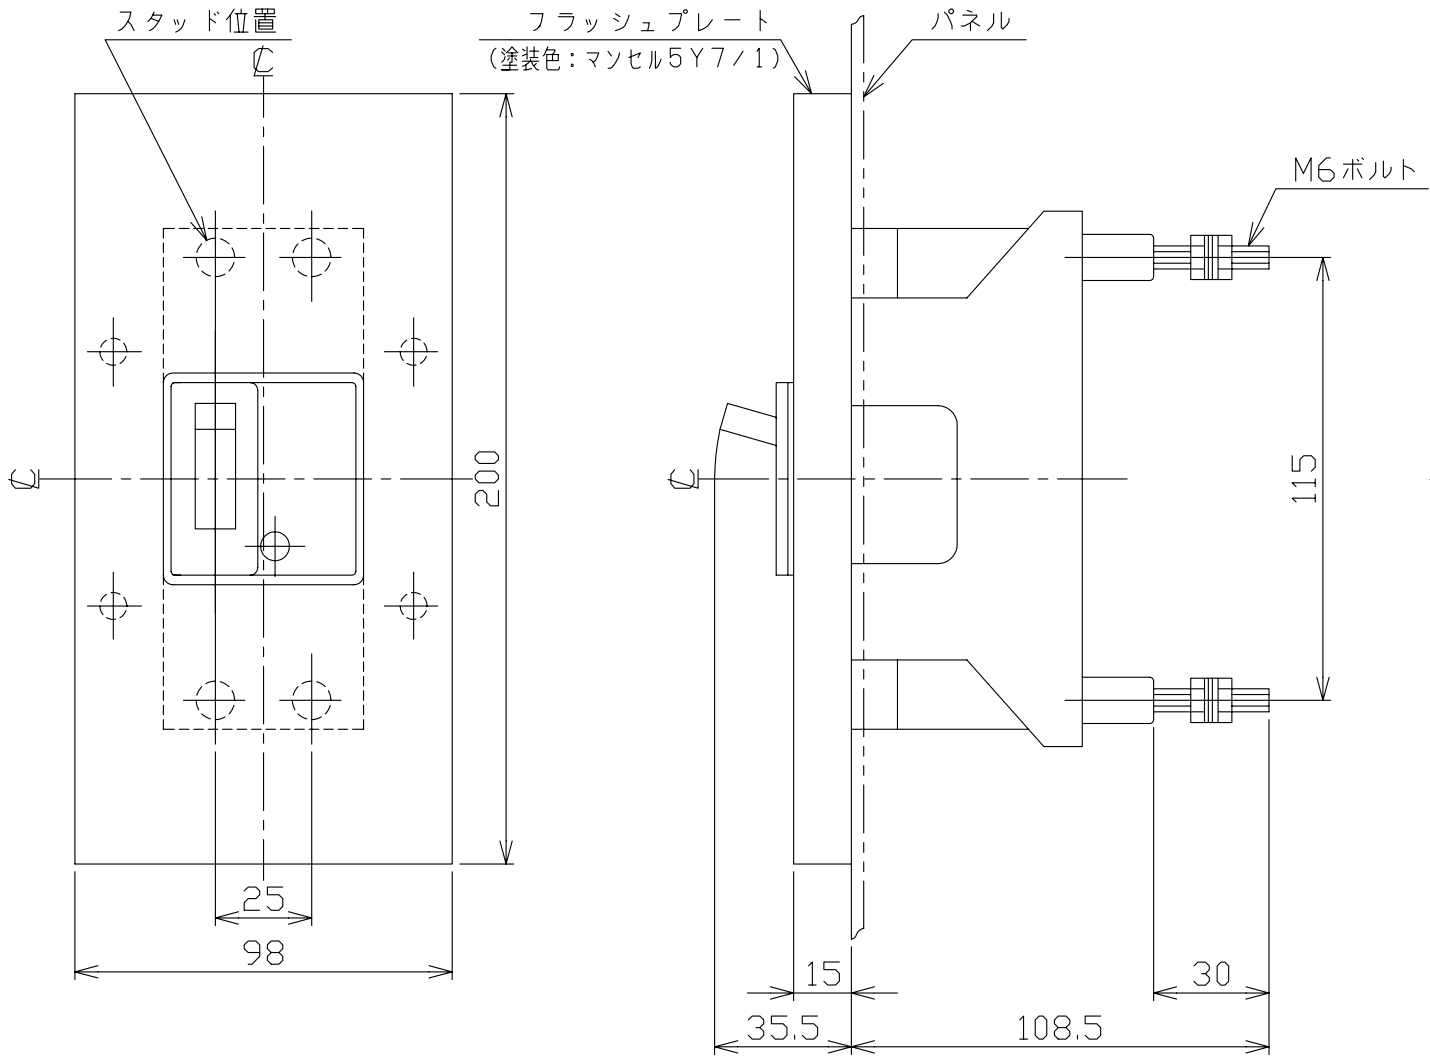

配線用遮断器 埋込形

型 式		B - 5 2 F D																									
フ レ ー ム		50AF																									
極 数 (P)・素 子 数 (E)		2P・2E																									
定 格 電 圧 (V)		AC500																									
定 格 電 流 (A)		5, 10, 15, 20, 30, 40, 50																									
定 格 遮 断 容 量 (k A)																											
A C	100V																										
	200V	35																									
	440V	10																									
	500V	2,5																									
D C	125V																										
	250V																										
引き外し方式		完全電磁																									
標準接続方式		丸スタッド方式																									
基準周囲温度		40℃																									
重 量 (k g)		1,1																									
備 考		J I S C 8201-2-1 附属書2 (J I S Q 1000に基づく自己適合宣言)																									
御納入先																											
日付					受領印					数量																	
承認		検 図		製 図		設 計																					
																											
年 月 日		三 角 法		B		-		5		2		F		D		0		3									
H05.08.17																											
テンパール工業株式会社																											

A
B
C
D
E
F
G
H

1234567891011