
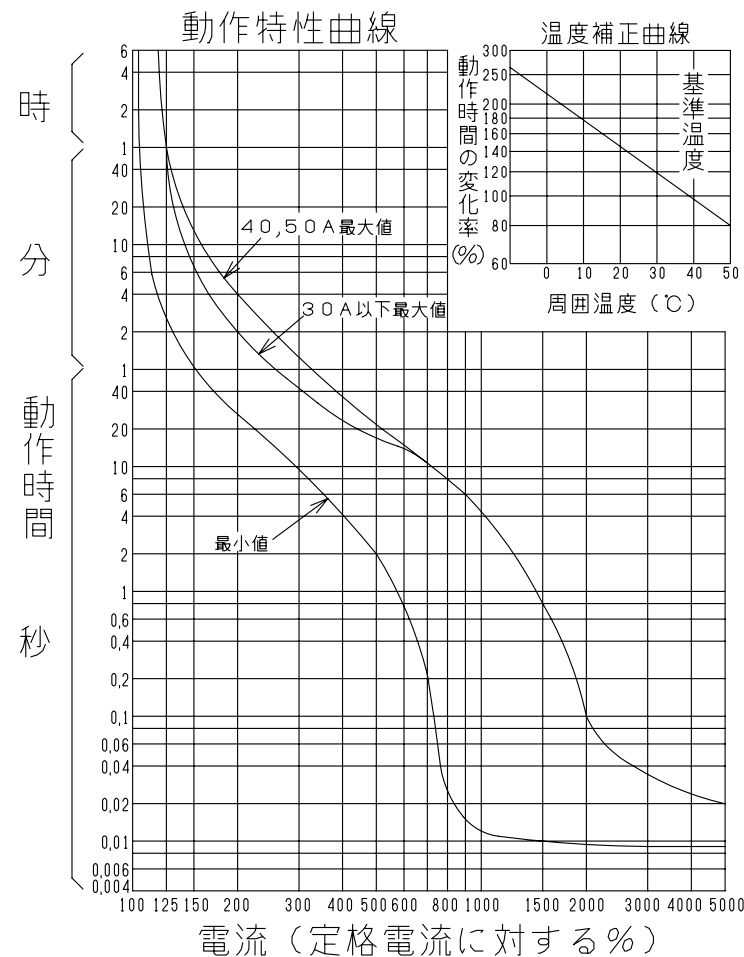
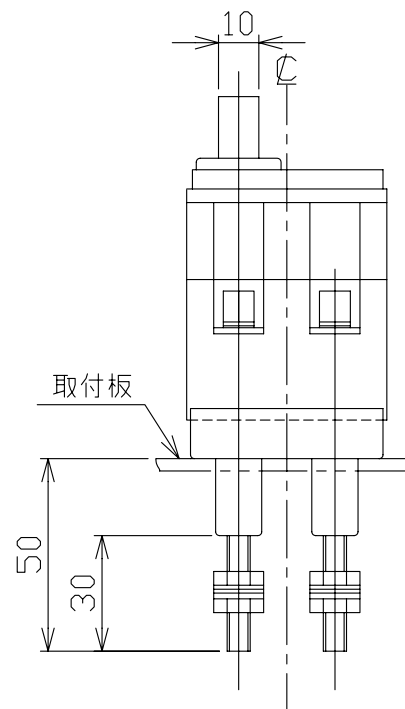
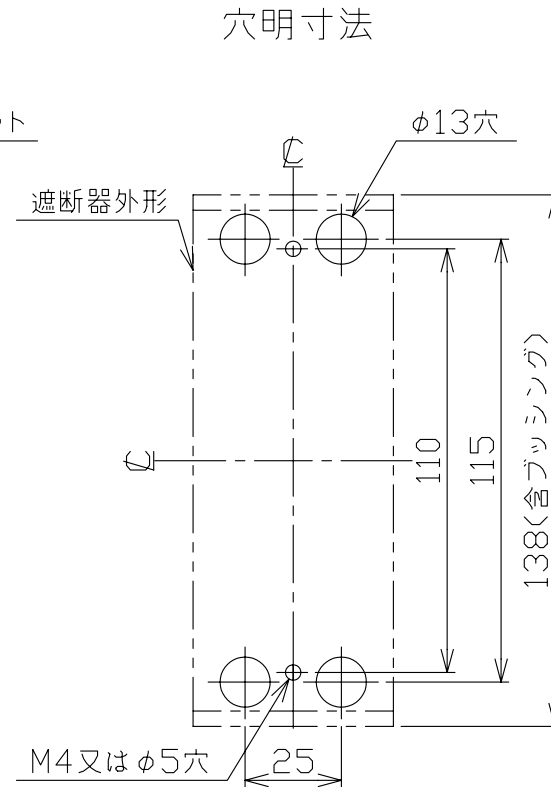
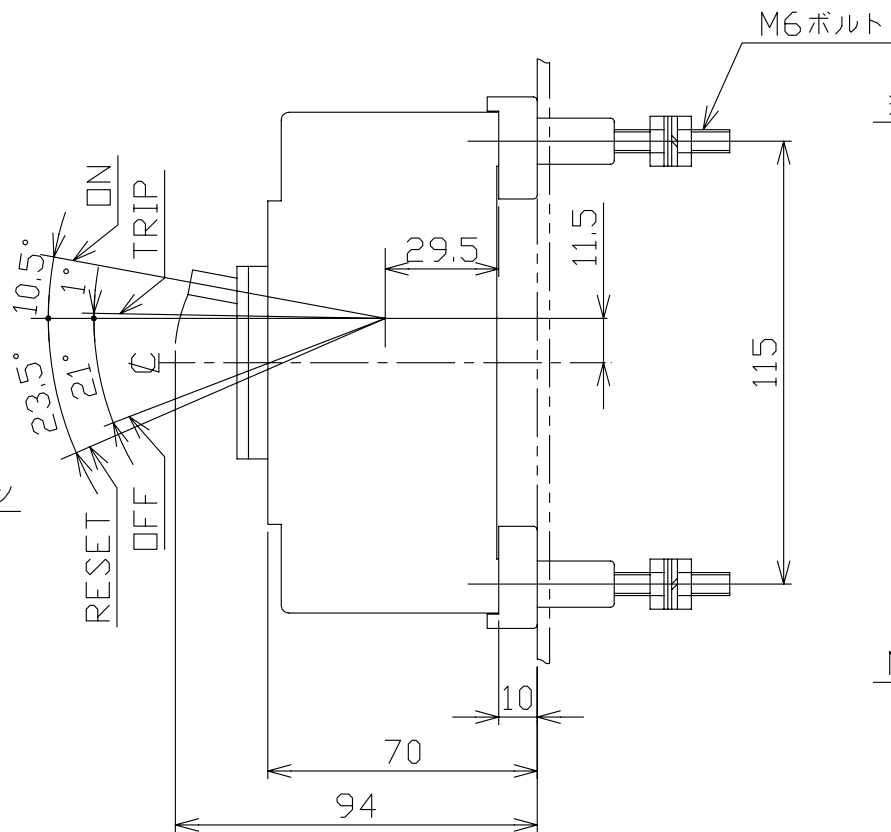


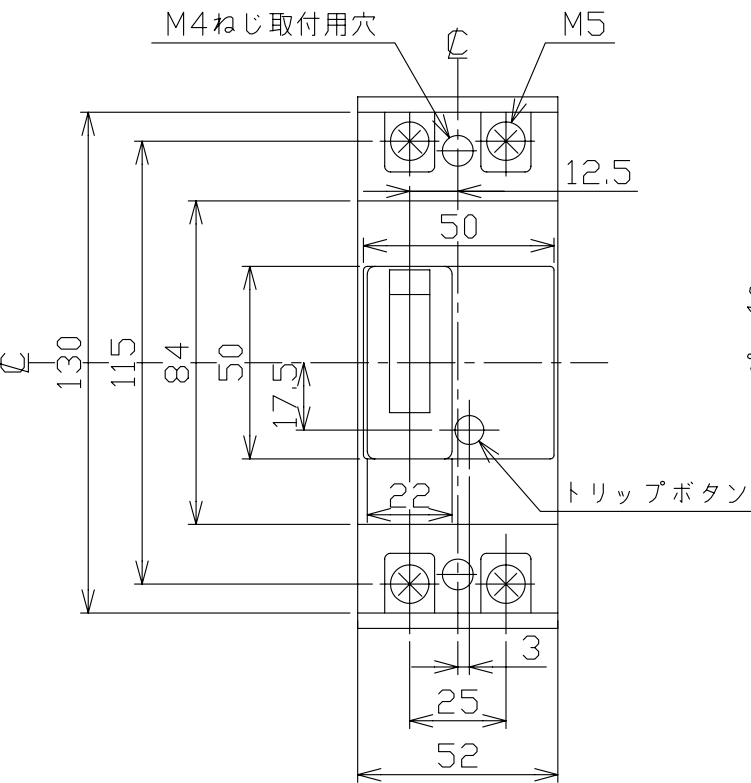

型 式	B - 5 2 F D																
フ レ ー ム	5 0 A F																
極数(P)・素子数(E)	2 P・2 E																
定格電圧 (V)	A C 5 0 0																
定格電流 (A)	5, 10, 15, 20, 30, 40, 50																
定格遮断容量 (k A)																	
A C	100V																
	200V	3 5															
	440V	1 0															
	500V	2.5															
D C	125V																
	250V																
引き外し方式	完全電磁																
標準接続方式	丸スタッド方式																
基準周囲温度	40℃																
重量 (k g)	0.73																
備 考	J I S C 8 2 0 1 - 2 - 1 附属書2 (J I S Q 1 0 0 0 に基づく自己適合宣言)																
御納入先																	
日付				受領印				数量									
承認	検 図		製 図		設 計												
																	
年 月 日	三 角 法			B	-	5	2	F	D	0	2						
テンパール工業株式会社																	