
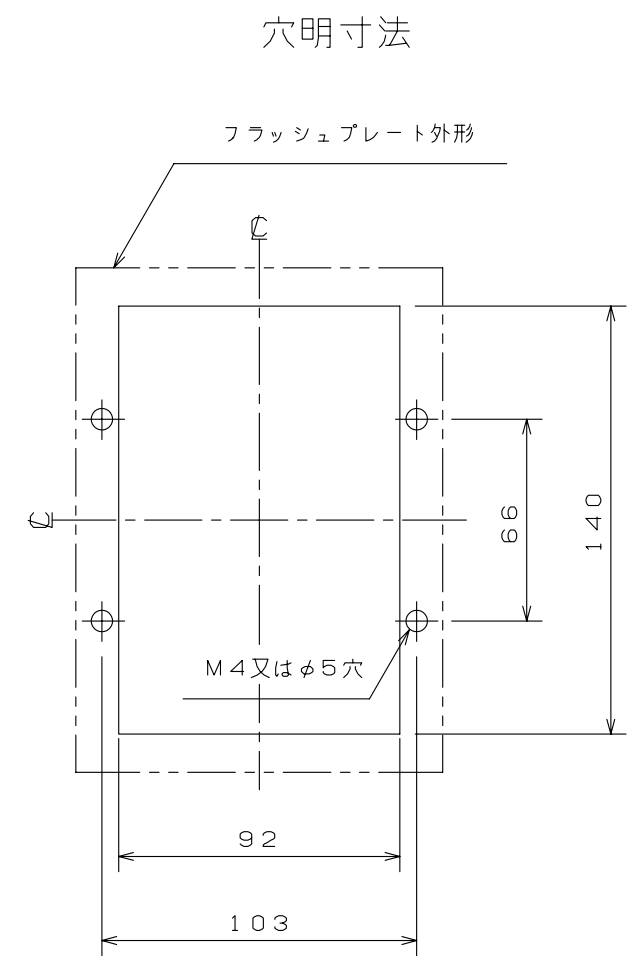




1 2 3 4 5 6 7 8 9 10 11

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

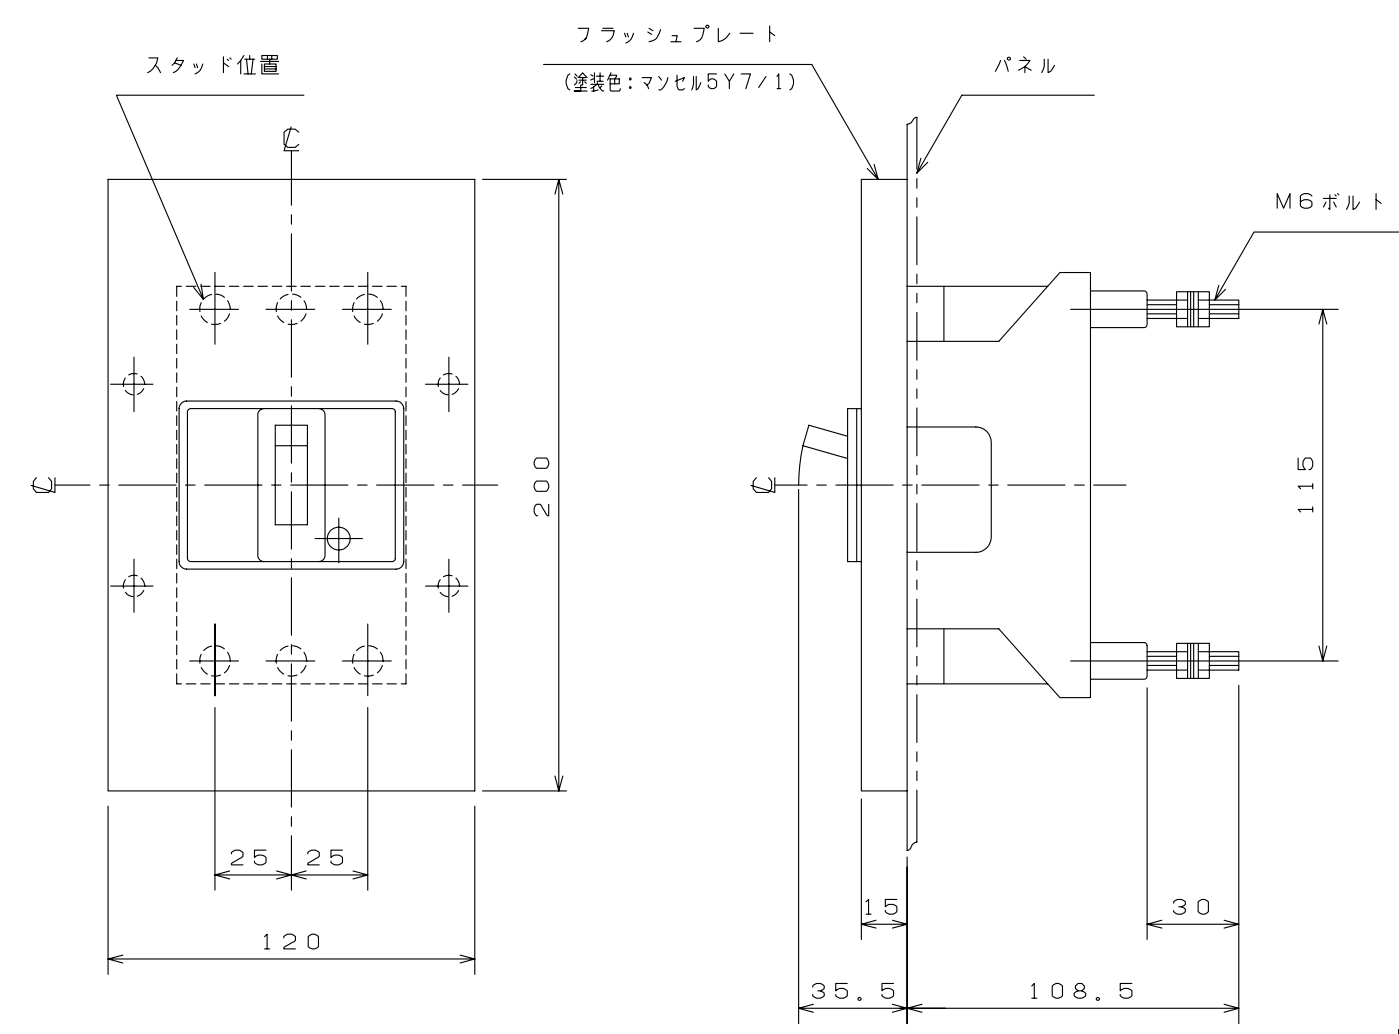

配線用遮断器 埋込形

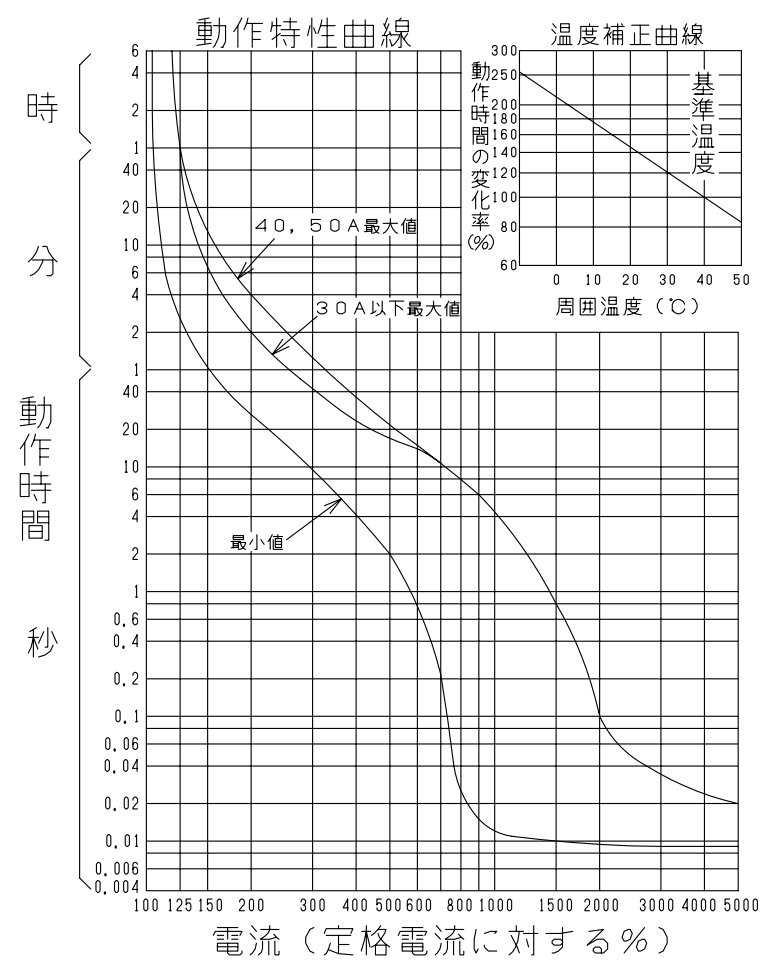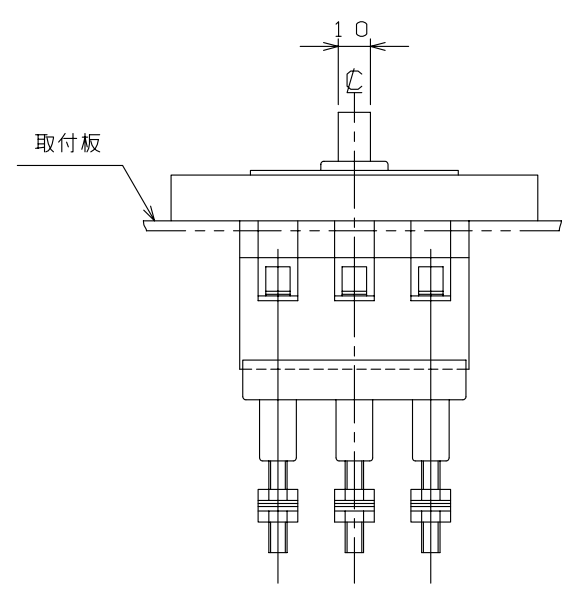

型 式		B - 5 3 F E A											
フ レ ム		50AF											
極数(P)・素子数(E)		3P・3E											
定格電圧 (V)		AC500											
定格電流 (A)		5, 10, 15, 20, 30, 40, 50											
定格遮断容量 (kA)													
A C	100V												
	200V	1.0											
	440V	7.5											
	500V	2.5											
D C	125V												
	250V												
引き外し方式		完全電磁											
標準接続方式		丸スタッド方式											
基準周囲温度		40℃											
重量 (kg)		1.5											
備 考		JIS C 8201-2-1 附属書2 (JIS Q 1000に基づく自己適合宣言)											
御納入先													
日付				受領印					数量				
承認		検 図		製 図		設 計							
													
年 月 日		三 角 法		B - 5 3 F E A 0 3									
H05.08.18													
テンパール工業株式会社													

1 2 3 4 5 6 7 8 9 10 11