
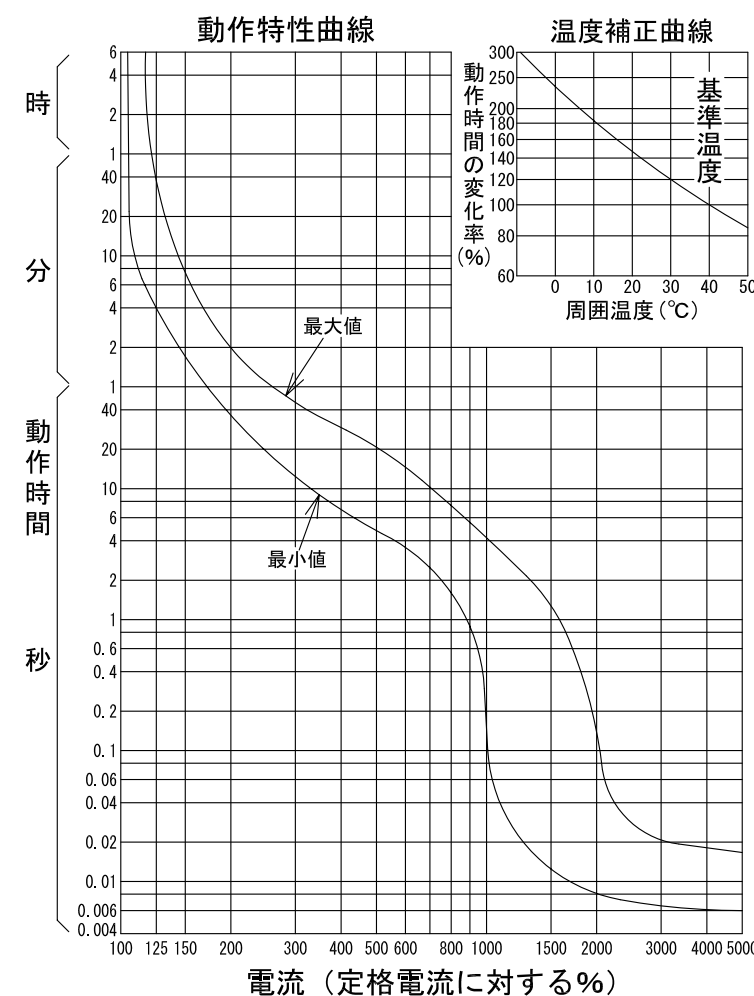
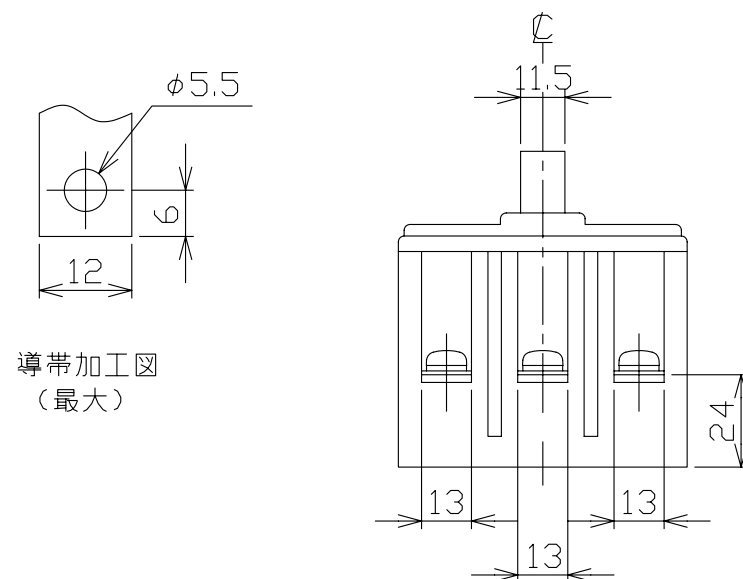
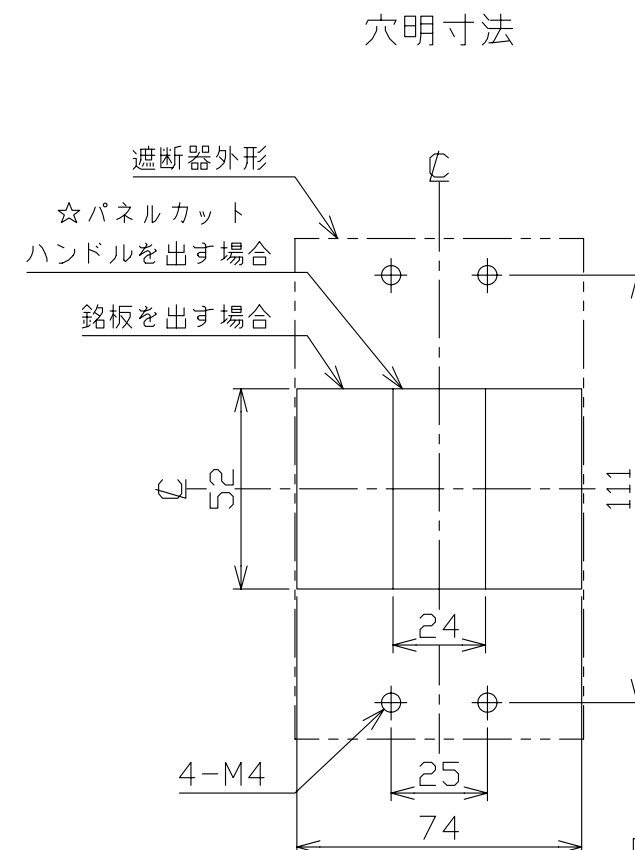


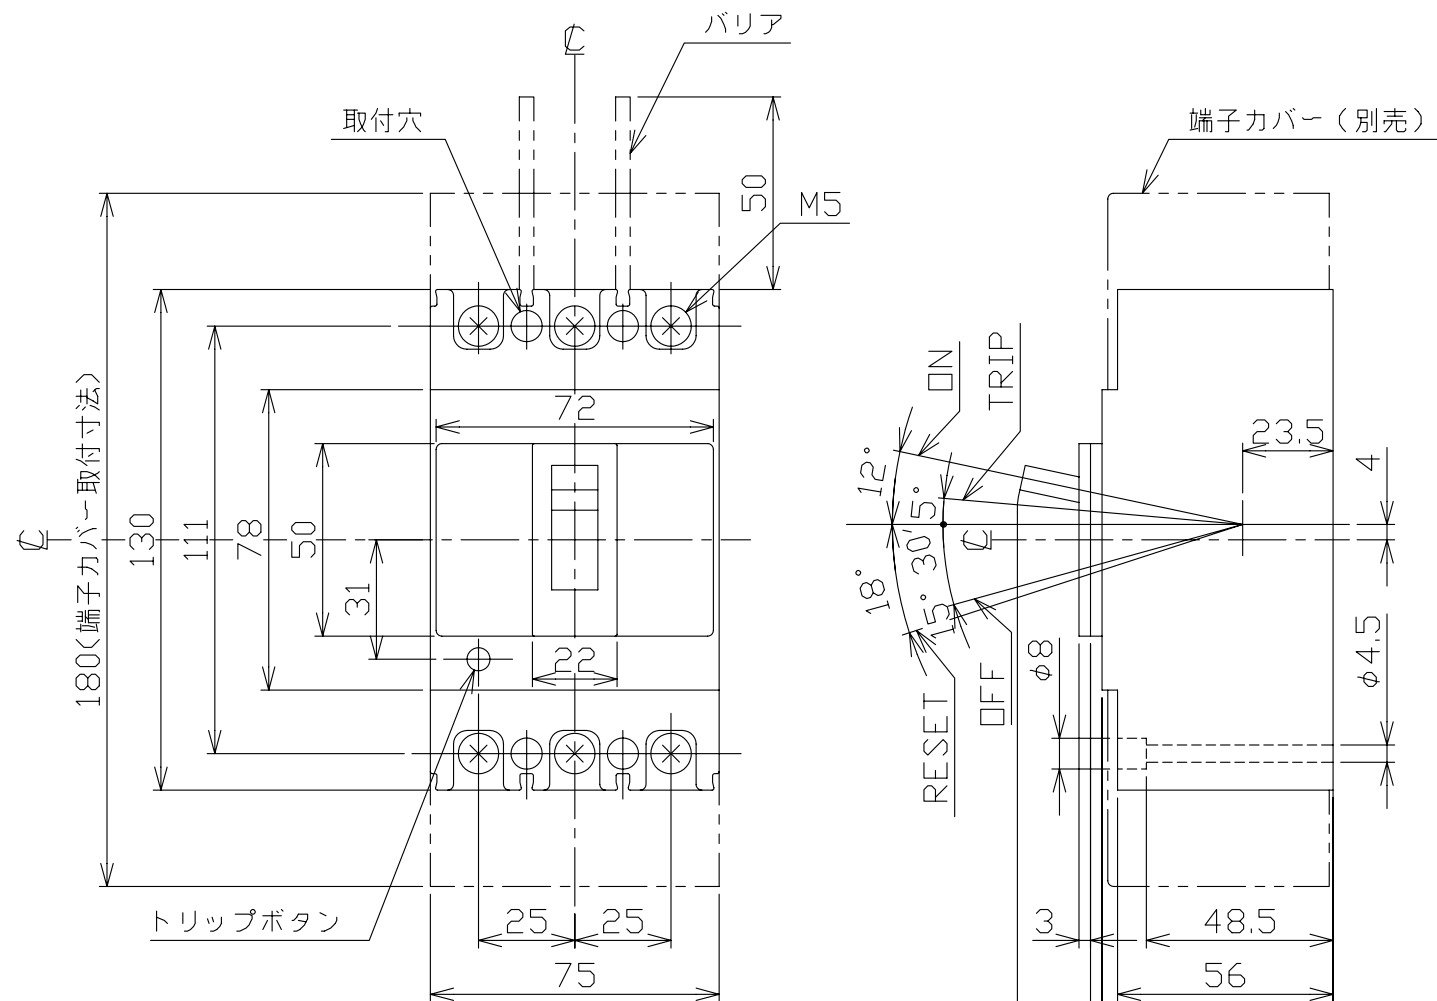

型 式		B - 5 3 S									
フ レーム		50AF									
極数(P)・素子数(E)		3P・3E									
定格電圧 (V)		AC500									
定格電流 (A)		15, 20, 30, 40, 50									
定格遮断容量 (kA)											
A C	100V	10									
	200V	10									
	415V	5									
	500V	2.5									
D C	125V										
	250V										
引き外し方式		完全電磁									
標準接続方式		線押え方式 (圧着端子使用可能)									
基準周囲温度		40℃									
重 量 (k g)		0.78									
備 考		J I S C 8201-2-1 附属書2 (J I S Q 1000に基づく自己適合宣言)									
御納入先											
日付				受領印				数量			
承 認		検 図		製 図		設 計					
											
年 月 日		三 角 法		B113-3P0001							
H05.08.09											
テンパール工業株式会社											