
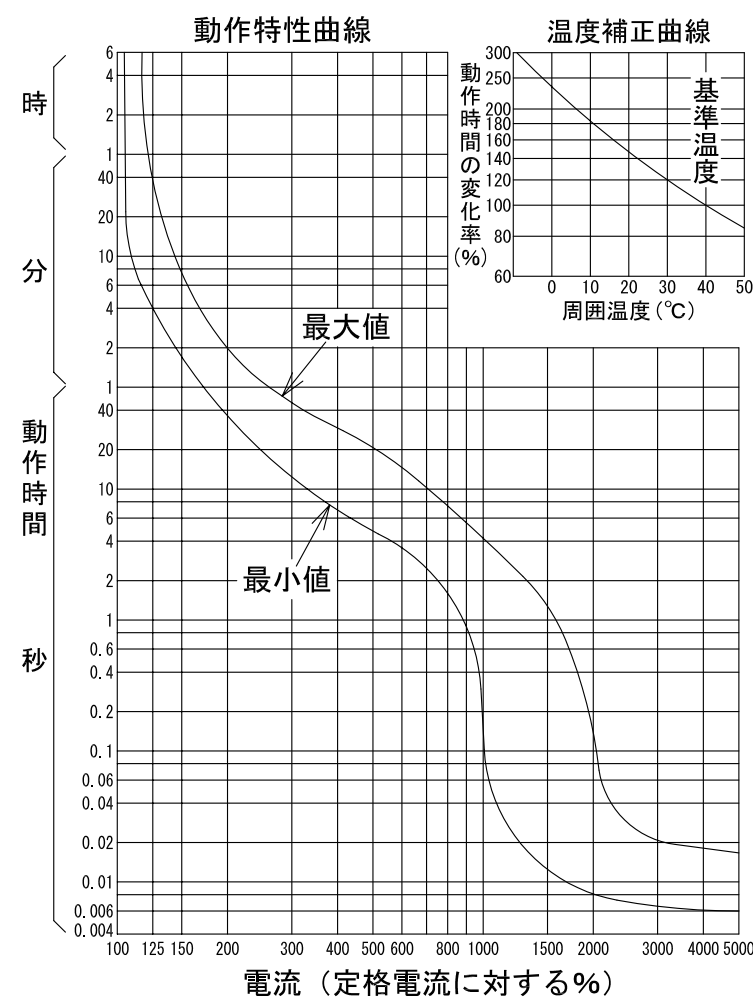
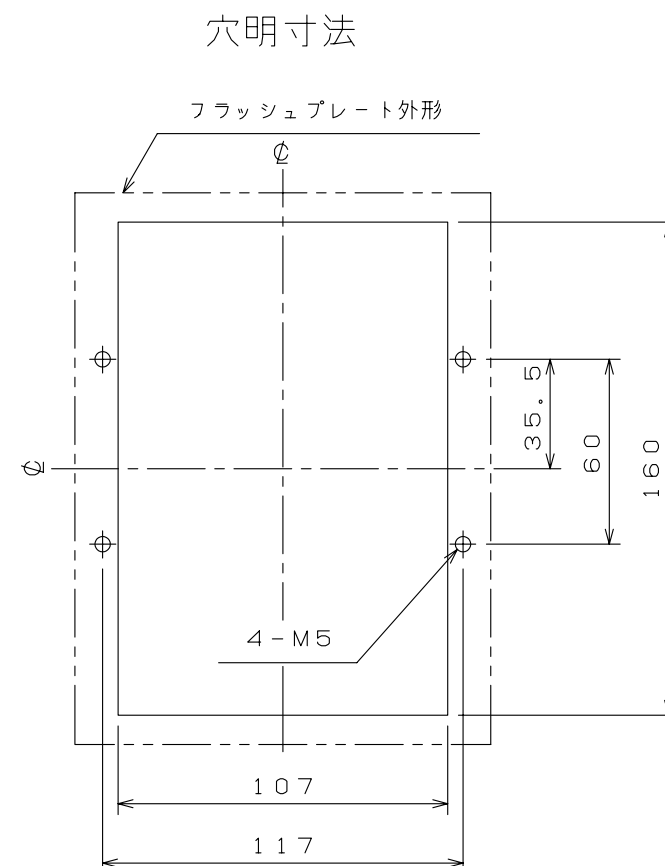
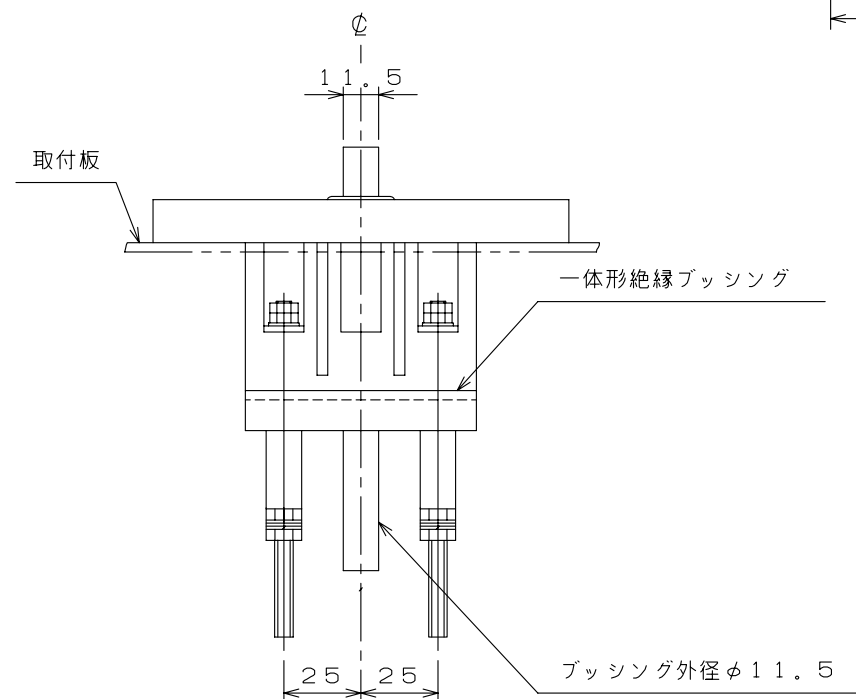


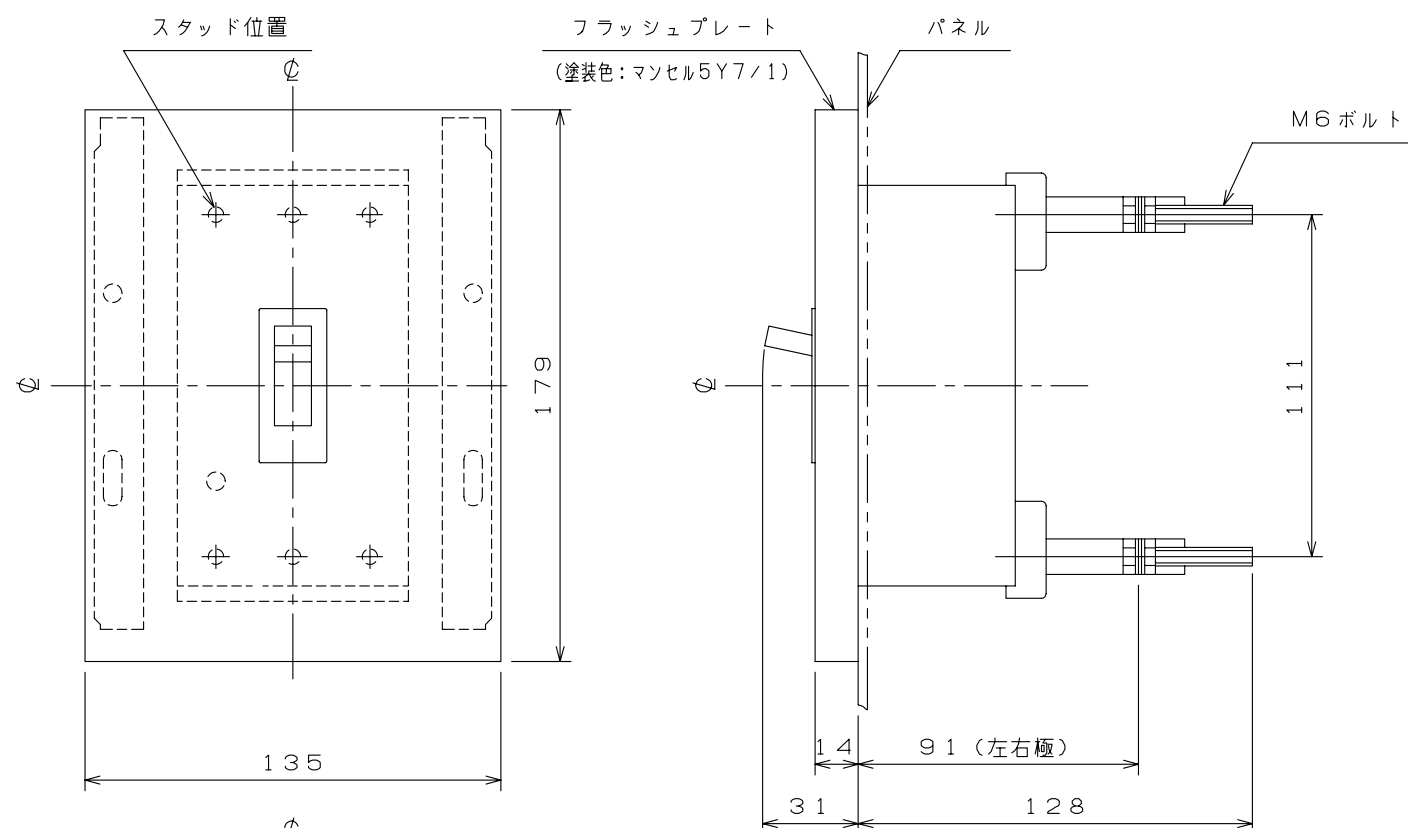

型 式		B - 6 2 S									
フ レ ム		60AF									
極数(P)・素子数(E)		2P・2E									
定格電圧 (V)		AC500									
定格電流 (A)		60									
定格遮断容量 (kA)											
A C	100V	10									
	200V	10									
	415V	5									
	500V	2.5									
D C	125V										
	250V										
引き外し方式		完全電磁									
標準接続方式		丸スタッド方式									
基準周囲温度		40℃									
重量 (kg)		0.72									
備 考		J I S C 8201-2-1 附属書2 (J I S Q 1000に基づく自己適合宣言)									
御納入先											
日付		受領印		数量							
承認		検 図		製 図 設 計							
											
年 月 日		三 角 法		B2		2-2		P0		003	
H05.09.13											
テンパール工業株式会社											