


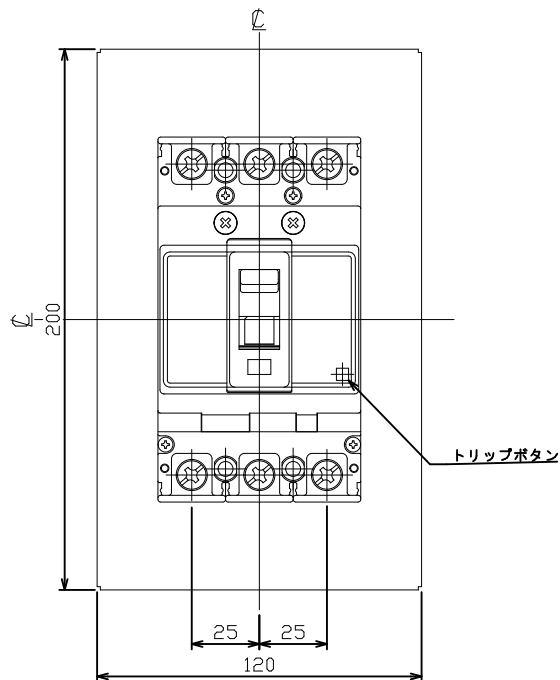


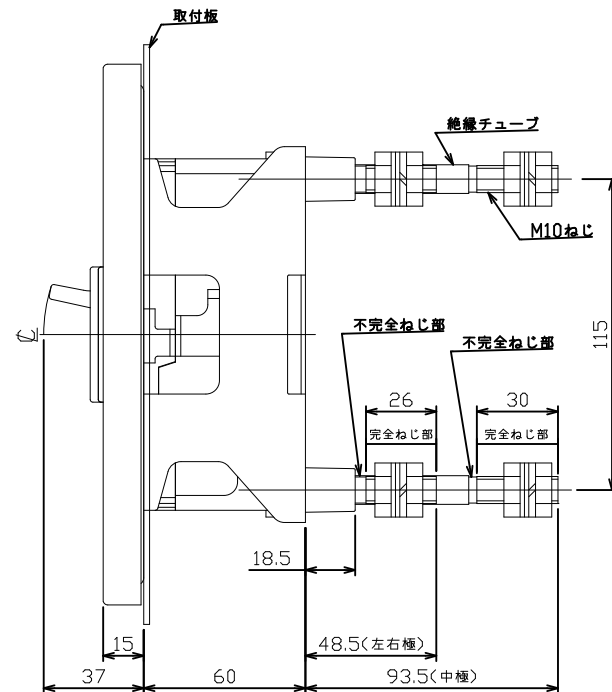

穴明寸法

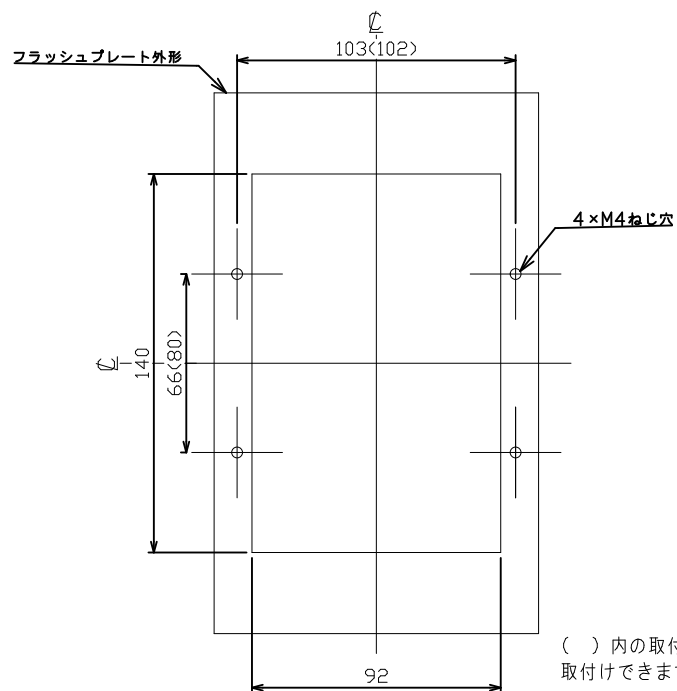

配線用遮断器 埋込形

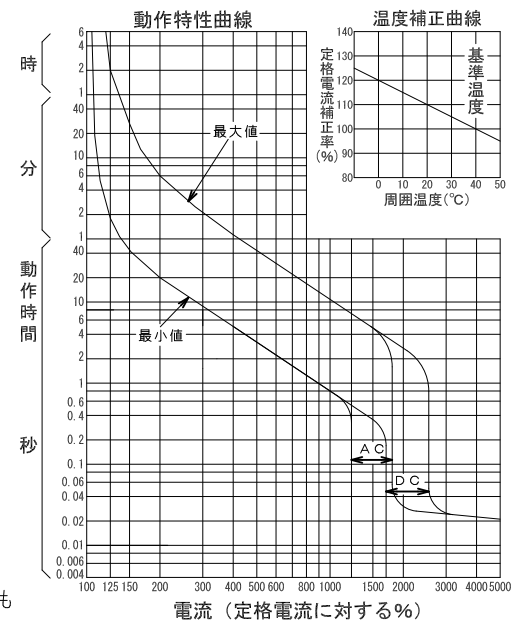

|                                                                                       |              |                                                                                       |  |                                                                                       |  |                                                                                       |  |    |  |  |  |  |  |  |
|---------------------------------------------------------------------------------------|--------------|---------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------|--|----|--|--|--|--|--|--|
| 型 式                                                                                   | B-63FB       |                                                                                       |  |                                                                                       |  |                                                                                       |  |    |  |  |  |  |  |  |
| フレーム                                                                                  | 60AF         |                                                                                       |  |                                                                                       |  |                                                                                       |  |    |  |  |  |  |  |  |
| 極数(P)・素子数(E)                                                                          | 3P・3E        |                                                                                       |  |                                                                                       |  |                                                                                       |  |    |  |  |  |  |  |  |
| 定格電圧 (V)                                                                              | AC500, DC250 |                                                                                       |  |                                                                                       |  |                                                                                       |  |    |  |  |  |  |  |  |
| 定格電流 (A)                                                                              | 60           |                                                                                       |  |                                                                                       |  |                                                                                       |  |    |  |  |  |  |  |  |
| 定格遮断容量 (kA)                                                                           | .            |                                                                                       |  |                                                                                       |  |                                                                                       |  |    |  |  |  |  |  |  |
|                                                                                       | 100V         |                                                                                       |  | .                                                                                     |  |                                                                                       |  |    |  |  |  |  |  |  |
| AC                                                                                    | 200V         |                                                                                       |  | 3.5                                                                                   |  |                                                                                       |  |    |  |  |  |  |  |  |
|                                                                                       | 440V         |                                                                                       |  | 1.0                                                                                   |  |                                                                                       |  |    |  |  |  |  |  |  |
|                                                                                       | 500V         |                                                                                       |  | 2.5                                                                                   |  |                                                                                       |  |    |  |  |  |  |  |  |
|                                                                                       | DC 125V      |                                                                                       |  | 7.5                                                                                   |  |                                                                                       |  |    |  |  |  |  |  |  |
| DC                                                                                    | 250V         |                                                                                       |  | 5                                                                                     |  |                                                                                       |  |    |  |  |  |  |  |  |
|                                                                                       | 引き外し方式 熱動電磁  |                                                                                       |  |                                                                                       |  |                                                                                       |  |    |  |  |  |  |  |  |
| 標準接続方式 丸スタッド方式                                                                        |              |                                                                                       |  |                                                                                       |  |                                                                                       |  |    |  |  |  |  |  |  |
| 基準周囲温度 40℃                                                                            |              |                                                                                       |  |                                                                                       |  |                                                                                       |  |    |  |  |  |  |  |  |
| 重量 (kg) 1.9                                                                           |              |                                                                                       |  |                                                                                       |  |                                                                                       |  |    |  |  |  |  |  |  |
| 備 考 JISC 8201-2-1 附属書2<br>(JIS Q 1000に基づく自己適合宣言)                                      |              |                                                                                       |  |                                                                                       |  |                                                                                       |  |    |  |  |  |  |  |  |
| 御納入先                                                                                  |              |                                                                                       |  |                                                                                       |  |                                                                                       |  |    |  |  |  |  |  |  |
| 日付                                                                                    |              | 受領印                                                                                   |  |                                                                                       |  |                                                                                       |  | 数量 |  |  |  |  |  |  |
| 承認                                                                                    |              | 検 図                                                                                   |  | 製 図                                                                                   |  | 設 計                                                                                   |  |    |  |  |  |  |  |  |
|  |              |  |  |  |  |  |  |    |  |  |  |  |  |  |
| 年 月 日 二 角 法                                                                           |              |                                                                                       |  | B-63FB03                                                                              |  |                                                                                       |  |    |  |  |  |  |  |  |
| H28.06.29                                                                             |              |                                                                                       |  |                                                                                       |  |                                                                                       |  |    |  |  |  |  |  |  |
| テンパール工業株式会社                                                                           |              |                                                                                       |  |                                                                                       |  |                                                                                       |  |    |  |  |  |  |  |  |