
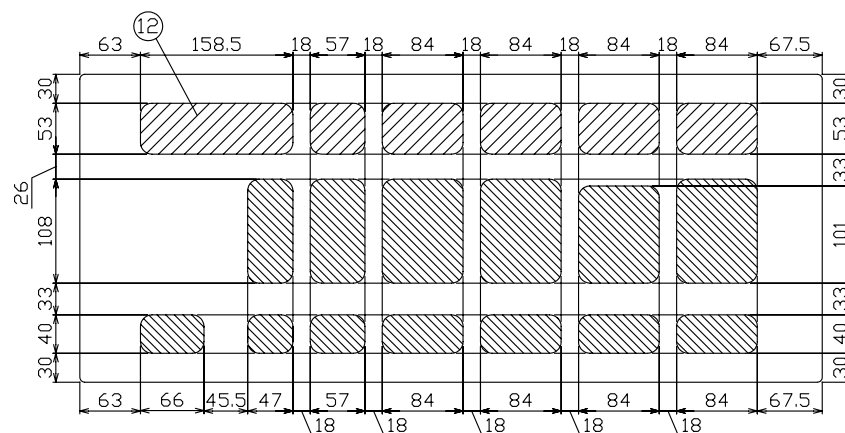
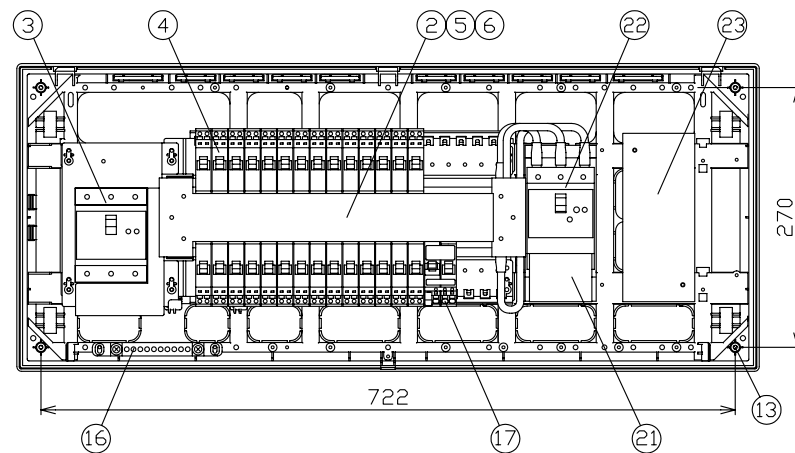
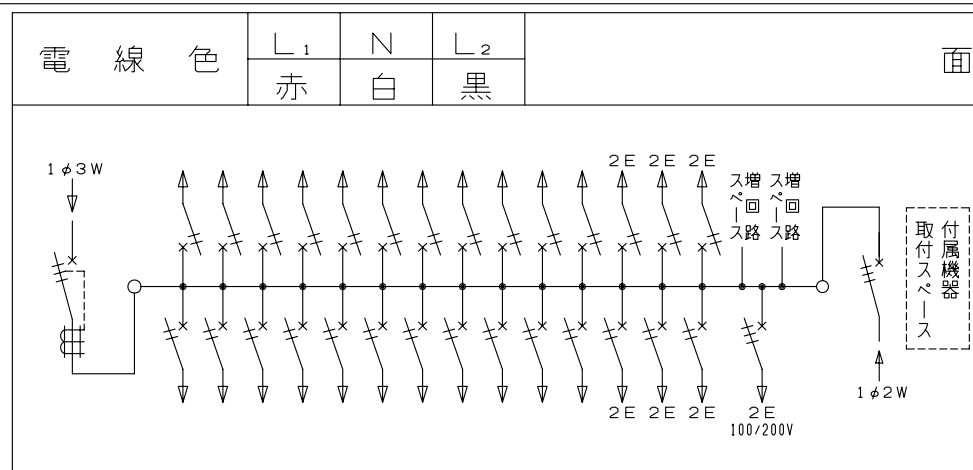
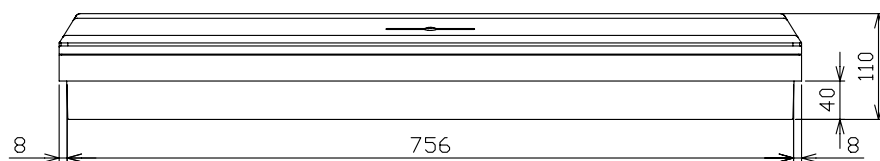
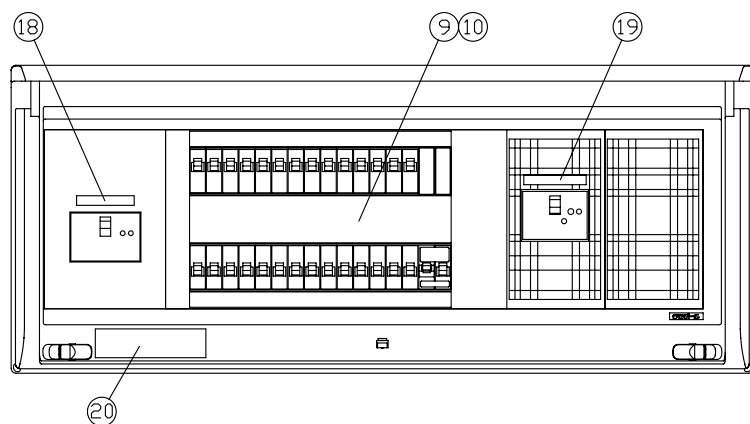
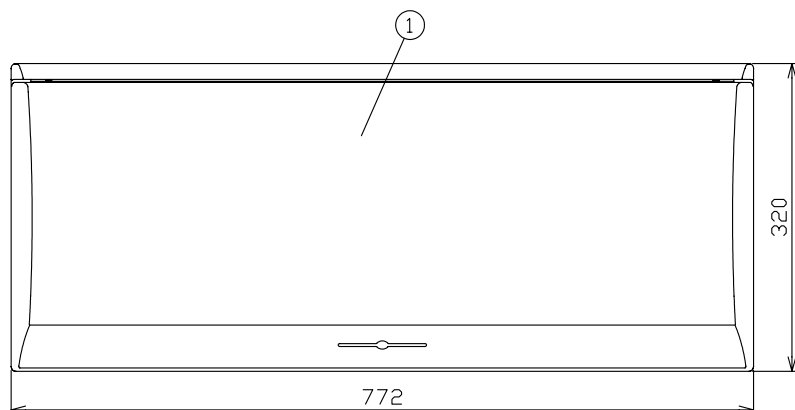
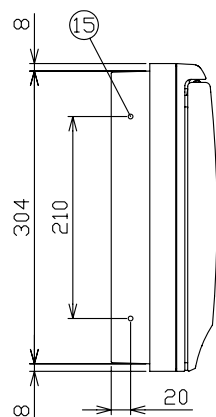


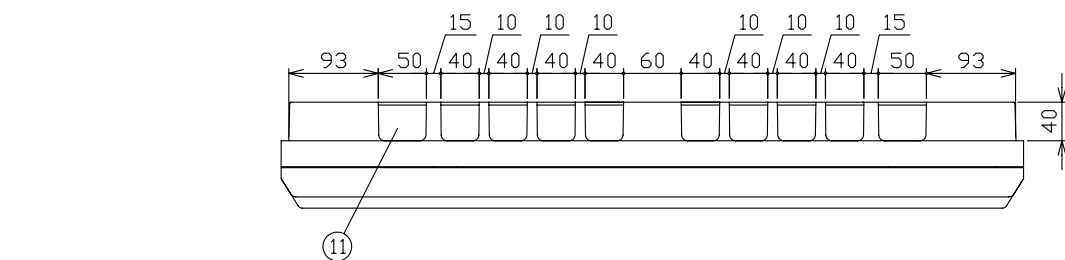

配線孔寸法図

回 路 銘 板

1	5	9	13	17	21	25	29
3	7	11	15	19	23	27	31
2	6	10	14	18	22	26	30
4	8	12	16	20	24	28	

備 考	リミッター スペース	主開閉器	一次送り回路	分 岐 開 閉 器 数				太陽光側開閉器	付属機器取付 スペース	分 電 盤 定 格		キャビネット仕様(露出・半埋込兼用形)	尺度	／				図 番	
		漏電遮断器		安全ブレーカ	安全ブレーカ	単3分岐ブレーカ	増 回 路	配線用遮断器		相線式	1 φ 3 W	材 質	難燃性合成樹脂 (自己消火性)	日付	年	月	日		
	3P3E	P E A	2P1E 20A	2P2E 20A	2P2E 20A	ス ペ ース	3P2E	定格電流	1 0 0 A	色 彩	マンセル 8GY9.7/0.2	承認	検図	設計	製図	住 宅 用 分 電 盤			
	—	1 0 0 A	—	2 2	6	1	2	3 0 A	有					今 本	羽 生	品 田	長 力	型式	MG310282T2N1P (太陽光発電システム用+単3分岐ブレーカ組込+機器取付スペース付)
主幹用漏電遮断器 太陽光側配線用遮断器 単3中性線欠相保護付 (過電圧検出リード線付) 定格動作過電圧 135V 定格過電圧動作時間 1秒以内		3P3E	P E A	2P1E 20A	2P2E 20A	2P2E 20A	ス ペ ース	3P2E											