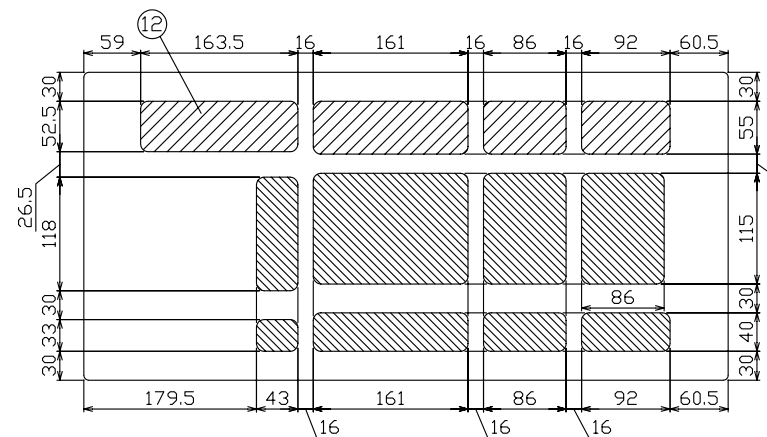
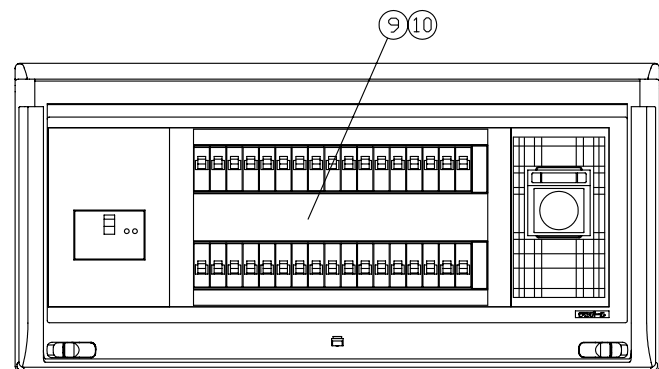
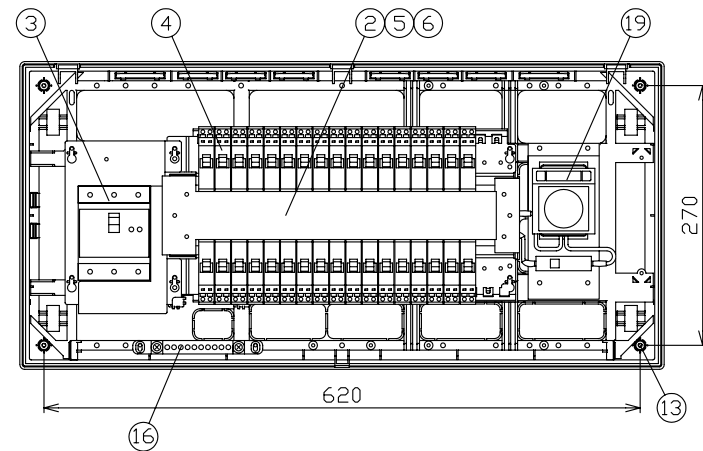
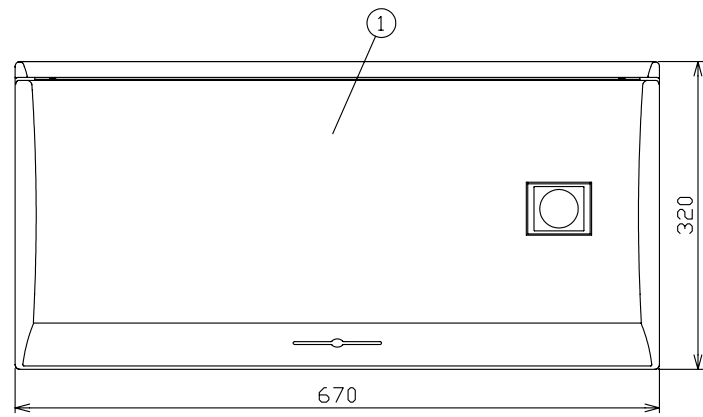
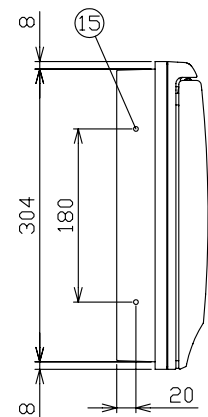
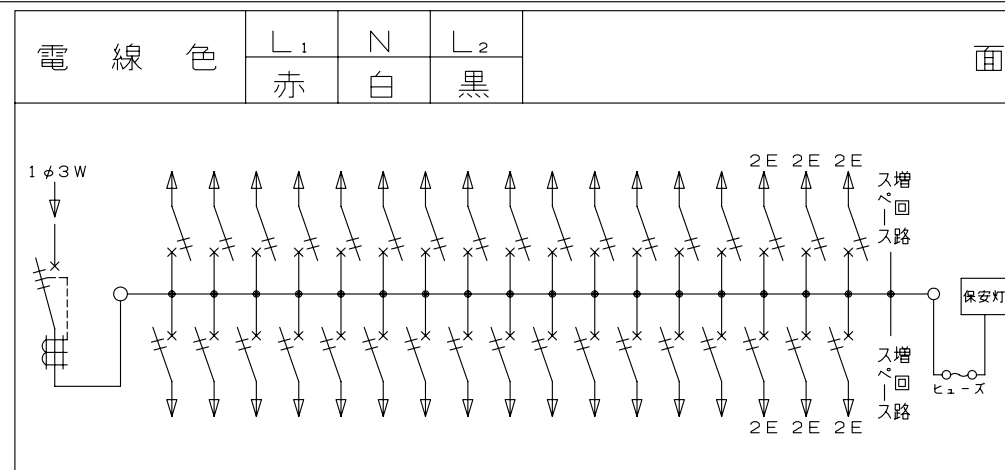
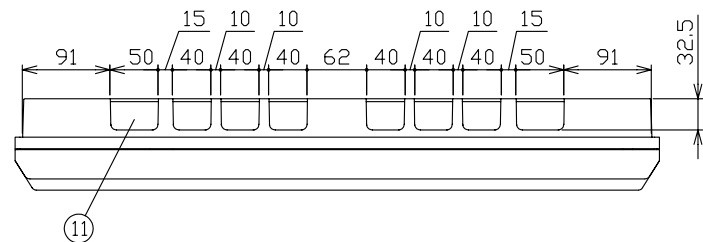


1	5	9	13	17	21	25	29	33
3	7	11	15	19	23	27	31	35
2	6	10	14	18	22	26	30	34
4	8	12	16	20	24	28	32	36

備 考	リミッター スペース	主開閉器	一次送り回路	分 岐 開 閉 器 数				付属機器取付 スペース	分 電 盤 定 格		キャビネット仕様（露出・半埋込兼用形）		尺度	／				図 番							
		漏電遮断器		安全ブレーカ	安全ブレーカ		増 回 路 ス ペ ース		相線式	1 φ 3 W	材 質	難燃性合成樹脂 （自己消火性）	日付	年	月	日	承認	検図	設計	製図					
主幹用漏電遮断器 単3中性線欠相保護付 （過電圧検出リード線付） 定格動作過電圧 135V 定格過電圧動作時間 1秒以内	—	3P2E	P E A	2P1E 20A	2P2E 20A	P E A	2	—	定格電流	100A	色 彩	マンセル 8GY9,7/0,2									住 宅 用 分 電 盤				
		100A	—	28	6																				
		GBU-103-1KC		B-1N	B-2N																				