
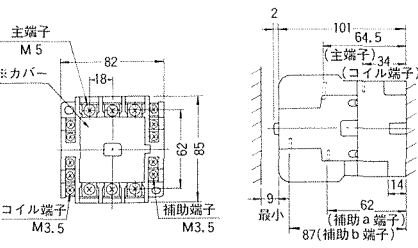


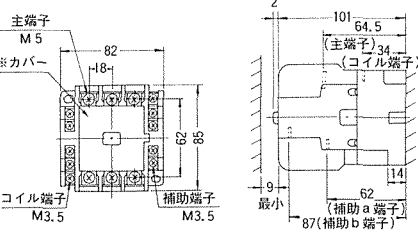


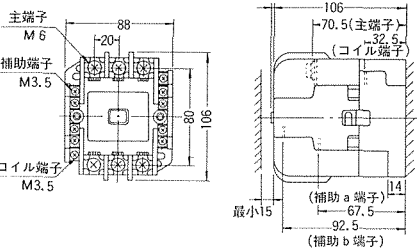


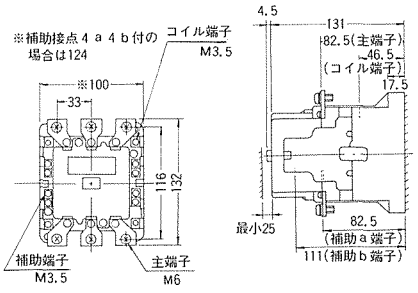





外形寸法	穴明寸法図(mm)	接点構成図	端子部寸法(mm)											
MP-25N 			<table><tr><td rowspan="3">主回路</td><td>端子ねじ</td><td>M5</td></tr><tr><td>端子寸法</td><td>A 12.5 B 6 C 8</td></tr><tr><td>端子ねじ</td><td>M3.5</td></tr><tr><td rowspan="3">操作回路</td><td>端子寸法</td><td>A 7.8 B 5.5 C 4.8</td></tr></table>	主回路	端子ねじ	M5	端子寸法	A 12.5 B 6 C 8	端子ねじ	M3.5	操作回路	端子寸法	A 7.8 B 5.5 C 4.8	
主回路	端子ねじ	M5												
	端子寸法	A 12.5 B 6 C 8												
	端子ねじ	M3.5												
操作回路	端子寸法	A 7.8 B 5.5 C 4.8												
	MP-30N 			<table><tr><td rowspan="3">主回路</td><td>端子ねじ</td><td>M5</td></tr><tr><td>端子寸法</td><td>A 12.5 B 6 C 8</td></tr><tr><td>端子ねじ</td><td>M3.5</td></tr><tr><td rowspan="3">操作回路</td><td>端子寸法</td><td>A 7.8 B 5.5 C 4.8</td></tr></table>	主回路	端子ねじ	M5	端子寸法	A 12.5 B 6 C 8	端子ねじ	M3.5	操作回路	端子寸法	A 7.8 B 5.5 C 4.8
	主回路	端子ねじ	M5											
端子寸法		A 12.5 B 6 C 8												
端子ねじ		M3.5												
操作回路	端子寸法	A 7.8 B 5.5 C 4.8												
	MP-50N 	 ●66×78の取付穴は袋穴です。ドライバー等で穴を明けて使用してください。		<table><tr><td rowspan="3">主回路</td><td>端子ねじ</td><td>M6</td></tr><tr><td>端子寸法</td><td>A 16.5 B 8 C 8</td></tr><tr><td>端子ねじ</td><td>M3.5</td></tr><tr><td rowspan="3">操作回路</td><td>端子寸法</td><td>A 7.8 B 5.5 C 4.5</td></tr></table>	主回路	端子ねじ	M6	端子寸法	A 16.5 B 8 C 8	端子ねじ	M3.5	操作回路	端子寸法	A 7.8 B 5.5 C 4.5
	主回路	端子ねじ	M6											
端子寸法		A 16.5 B 8 C 8												
端子ねじ		M3.5												
操作回路	端子寸法	A 7.8 B 5.5 C 4.5												
	MP-60N 		 補助接点4a4bの場合この接点が追加されます	<table><tr><td rowspan="3">主回路</td><td>端子ねじ</td><td>M6</td></tr><tr><td>端子寸法</td><td>A 22 B 8 C 11</td></tr><tr><td>端子ねじ</td><td>M3.5</td></tr><tr><td rowspan="3">操作回路</td><td>端子寸法</td><td>A 7.8 B 5 C 4.5</td></tr></table>	主回路	端子ねじ	M6	端子寸法	A 22 B 8 C 11	端子ねじ	M3.5	操作回路	端子寸法	A 7.8 B 5 C 4.5
	主回路	端子ねじ	M6											
端子寸法		A 22 B 8 C 11												
端子ねじ		M3.5												
操作回路	端子寸法	A 7.8 B 5 C 4.5												

寸法	取付間隔(最小)(mm)				
型式	D	E	F	G	H
MP-25N	9	15	5	10	5
MP-30N	9	15	5	10	5
MP-50N	15	15	5	10	5
MP-60N	25	15	10	10	10

取付間隔



端子部寸法

