
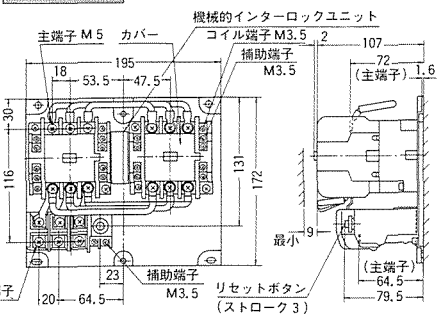

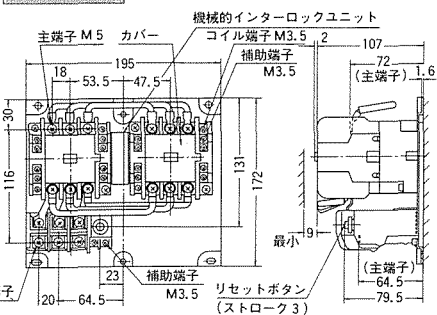

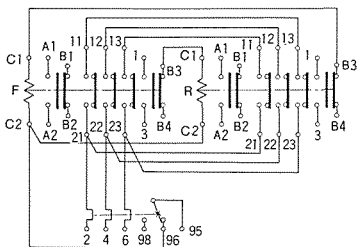
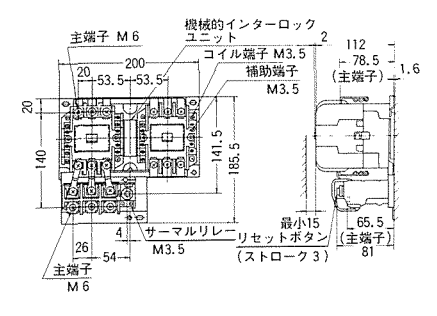

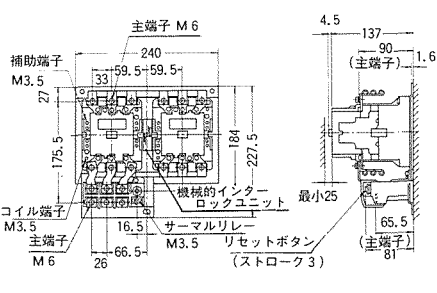

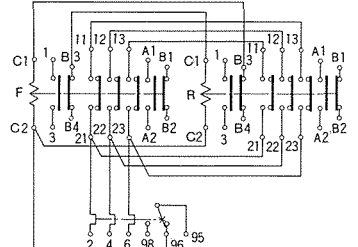


可逆形・電磁開閉器


外形寸法		穴明寸法図(mm)		接点構成図		端子部寸法(mm)																																																			
MR-25N3 						<table><tr><th colspan="4">電磁接触器</th><th colspan="2">サーマルリレー</th></tr><tr><td rowspan="3">主回路</td><td>端子ねじ</td><td>M5</td><td>M5</td><td></td><td></td></tr><tr><td rowspan="3">端子寸法</td><td>A</td><td>12.5</td><td>13</td><td></td><td></td></tr><tr><td>B</td><td>6</td><td>6.5</td><td></td><td></td></tr><tr><td>C</td><td>8</td><td>7</td><td></td><td></td></tr><tr><td rowspan="3">操作回路</td><td>端子ねじ</td><td>M3.5</td><td>M3.5</td><td></td><td></td></tr><tr><td rowspan="3">端子寸法</td><td>A</td><td>7.8</td><td>7.8</td><td></td><td></td></tr><tr><td>B</td><td>5.5</td><td>4</td><td></td><td></td></tr><tr><td>C</td><td>4.8</td><td>4.5</td><td></td><td></td></tr></table>		電磁接触器				サーマルリレー		主回路	端子ねじ	M5	M5			端子寸法	A	12.5	13			B	6	6.5			C	8	7			操作回路	端子ねじ	M3.5	M3.5			端子寸法	A	7.8	7.8			B	5.5	4			C	4.8	4.5		
電磁接触器				サーマルリレー																																																					
主回路	端子ねじ	M5	M5																																																						
	端子寸法	A	12.5	13																																																					
		B	6	6.5																																																					
C		8	7																																																						
操作回路	端子ねじ	M3.5	M3.5																																																						
	端子寸法	A	7.8	7.8																																																					
		B	5.5	4																																																					
C		4.8	4.5																																																						
MR-30N3 						<table><tr><th colspan="4">電磁接触器</th><th colspan="2">サーマルリレー</th></tr><tr><td rowspan="3">主回路</td><td>端子ねじ</td><td>M5</td><td>M5</td><td></td><td></td></tr><tr><td rowspan="3">端子寸法</td><td>A</td><td>12.5</td><td>13</td><td></td><td></td></tr><tr><td>B</td><td>6</td><td>6.5</td><td></td><td></td></tr><tr><td>C</td><td>8</td><td>7</td><td></td><td></td></tr><tr><td rowspan="3">操作回路</td><td>端子ねじ</td><td>M3.5</td><td>M3.5</td><td></td><td></td></tr><tr><td rowspan="3">端子寸法</td><td>A</td><td>7.8</td><td>7.8</td><td></td><td></td></tr><tr><td>B</td><td>5.5</td><td>4</td><td></td><td></td></tr><tr><td>C</td><td>4.8</td><td>4.5</td><td></td><td></td></tr></table>		電磁接触器				サーマルリレー		主回路	端子ねじ	M5	M5			端子寸法	A	12.5	13			B	6	6.5			C	8	7			操作回路	端子ねじ	M3.5	M3.5			端子寸法	A	7.8	7.8			B	5.5	4			C	4.8	4.5		
電磁接触器				サーマルリレー																																																					
主回路	端子ねじ	M5	M5																																																						
	端子寸法	A	12.5	13																																																					
		B	6	6.5																																																					
C		8	7																																																						
操作回路	端子ねじ	M3.5	M3.5																																																						
	端子寸法	A	7.8	7.8																																																					
		B	5.5	4																																																					
C		4.8	4.5																																																						
MR-50N3 						<table><tr><th colspan="4">電磁接触器</th><th colspan="2">サーマルリレー</th></tr><tr><td rowspan="3">主回路</td><td>端子ねじ</td><td>M6</td><td>M6</td><td></td><td></td></tr><tr><td rowspan="3">端子寸法</td><td>A</td><td>16.5</td><td>16.5</td><td></td><td></td></tr><tr><td>B</td><td>8</td><td>8.5</td><td></td><td></td></tr><tr><td>C</td><td>8</td><td>8</td><td></td><td></td></tr><tr><td rowspan="3">操作回路</td><td>端子ねじ</td><td>M3.5</td><td>M3.5</td><td></td><td></td></tr><tr><td rowspan="3">端子寸法</td><td>A</td><td>7.8</td><td>7.8</td><td></td><td></td></tr><tr><td>B</td><td>5.5</td><td>4</td><td></td><td></td></tr><tr><td>C</td><td>4.5</td><td>4.5</td><td></td><td></td></tr></table>		電磁接触器				サーマルリレー		主回路	端子ねじ	M6	M6			端子寸法	A	16.5	16.5			B	8	8.5			C	8	8			操作回路	端子ねじ	M3.5	M3.5			端子寸法	A	7.8	7.8			B	5.5	4			C	4.5	4.5		
電磁接触器				サーマルリレー																																																					
主回路	端子ねじ	M6	M6																																																						
	端子寸法	A	16.5	16.5																																																					
		B	8	8.5																																																					
C		8	8																																																						
操作回路	端子ねじ	M3.5	M3.5																																																						
	端子寸法	A	7.8	7.8																																																					
		B	5.5	4																																																					
C		4.5	4.5																																																						
MR-60N3 						<table><tr><th colspan="4">電磁接触器</th><th colspan="2">サーマルリレー</th></tr><tr><td rowspan="3">主回路</td><td>端子ねじ</td><td>M6</td><td>M6</td><td></td><td></td></tr><tr><td rowspan="3">端子寸法</td><td>A</td><td>22</td><td>16.5</td><td></td><td></td></tr><tr><td>B</td><td>8</td><td>8.5</td><td></td><td></td></tr><tr><td>C</td><td>11</td><td>8</td><td></td><td></td></tr><tr><td rowspan="3">操作回路</td><td>端子ねじ</td><td>M3.5</td><td>M3.5</td><td></td><td></td></tr><tr><td rowspan="3">端子寸法</td><td>A</td><td>7.8</td><td>7.8</td><td></td><td></td></tr><tr><td>B</td><td>5</td><td>4</td><td></td><td></td></tr><tr><td>C</td><td>4.5</td><td>4.5</td><td></td><td></td></tr></table>		電磁接触器				サーマルリレー		主回路	端子ねじ	M6	M6			端子寸法	A	22	16.5			B	8	8.5			C	11	8			操作回路	端子ねじ	M3.5	M3.5			端子寸法	A	7.8	7.8			B	5	4			C	4.5	4.5		
電磁接触器				サーマルリレー																																																					
主回路	端子ねじ	M6	M6																																																						
	端子寸法	A	22	16.5																																																					
		B	8	8.5																																																					
C		11	8																																																						
操作回路	端子ねじ	M3.5	M3.5																																																						
	端子寸法	A	7.8	7.8																																																					
		B	5	4																																																					
C		4.5	4.5																																																						

型 式	寸 法					取付間隔(最小)(mm)	
	D	E	F	G	H		
MR-25N3, MR-30N3	9	15	—	10	5		
MR-50N3	15	15	—	10	5		
MR-60N3, MR-100N3 MR-120N3, MR-150N3	25	15	—	10	10		
MR-200N3, MR-250N3	30	20	—	10	10		
MR-300N3, MR-400N3	40	30	—	10	10		


取付間隔



導体又は接地



標準接続図



端子部寸法

