



2. 端子台仕様

■外形寸法図


(A)

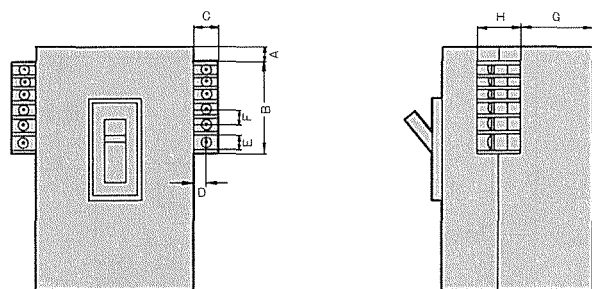


(B)

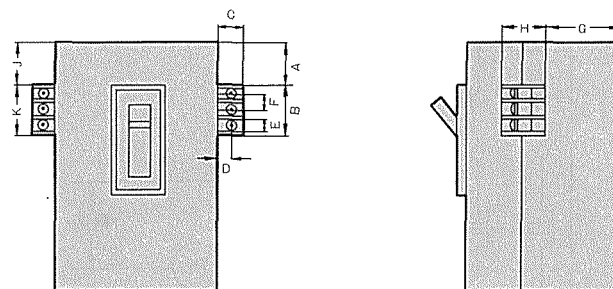

(C)

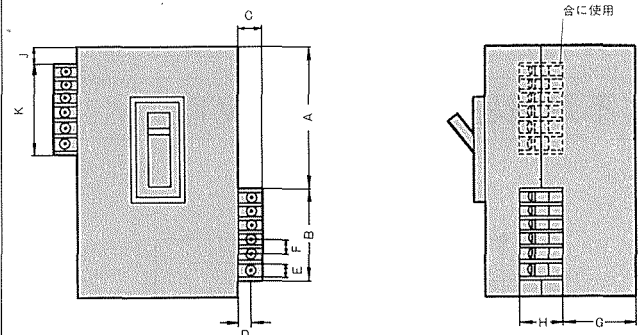

(D)

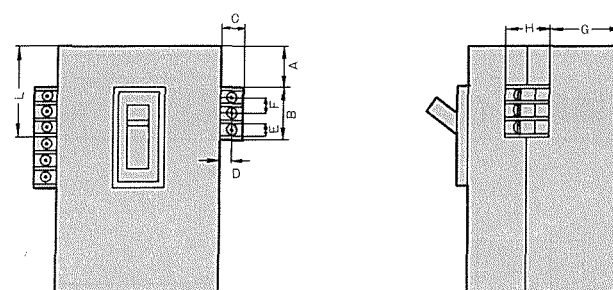


●端子台仕様寸法表

(mm)

型 式	端子ネジ径	A	B	C	D	E	F	G	H	J	K	L	外形寸法図
B-33E, B-53E (52E), B-63E (62E)	M3.5	26.5	36.5	17.5	11.5	8	11.5	7	27	26.5	36.5	—	(B)
B-53S (52S)	M3.5	34	72.5	17.5	11.5	8	11.5	25.5	27	19	72.5	—	(C)
B-103S (102S)	M3.5	38	72.5	17.5	11.5	8	11.5	25.5	27	—	—	—	(A)
B-33F (32F)	M3.5	15	32	16.5	7	8	10	14.5	30	—	—	—	(B)
B-53FA (52FA)	M3.5	9	62	16.5	7	8	10	18	30	—	—	—	(A)
B-103E (102E)	M3.5	59	36.5	17.5	11.5	8	11.5	25.5	27	—	—	96	(D)
B-103FA (102FA)	M3.5	3	62	16.5	7	8	10	27	30	—	—	—	(A)
B-53FK (52FK), B-103FK (102FK)	M3.5	11.5	62	16.5	7	8	10	43	30	—	—	—	(A)
B-123C (122C)	M3.5	53.5	36.5	17.5	11.5	8	11.5	25.5	27	—	—	90	(D)
B-223S (222S)	M3.5	64	72.5	17.5	11.5	8	11.5	25.5	27	—	—	—	(A)
B-223FA (222FA)	M3.5	10	62	16.5	7	8	10	46.5	30	—	—	—	(A)
B-253 (252), B-403C (402C)	M3.5	152.5	36.5	17.5	11.5	8	11.5	50	27	—	—	151	(D)
B-403FA (402FA), B-603HA (602HA) B-603FA (602FA), B-803FA	M3.5	191	62	16.5	7	8	10	46	30	21	62	—	(C)
B-1203FA, B-1003FA, B-803FK	M3.5	312	62	16.5	7	8	10	87	30	108	62	—	(C)

注) ①埋込形[F]仕様において本体裏面に端子台の取付けが可能な器種もありますのでお問い合わせ下さい。



直射日光の当る場所、露天
では使用しないで下さい。
分電盤等へ納めてご使用下さい。

